

05VA

05/07

CompACT Electric Actuator

EA Range



Typical applications

- Quarter turn applications such as ball, butterfly, plug valves and dampers, especially in harsh operating environments
- Suitable for marine applications and processes where vibration present

Key benefits

- Self-locking with minimum backlash in the transmission - prevents valve movement due to flow
- Manual override fitted as standard - valve can be operated in event of power failure
- Two torque switches - provide protection in event of actuator overloading

Specification

Power	110V/220V AC \pm 10%	50/60Hz single phase
Limit switches	Two open/close SPDT	250V AC, 10A
Motor thermal protection	Open 150°C nominal	
Angular rotation	110° max	Quarter turn
High reliability potentiometer	1k ohm standard, 5 k ohm option	Life: 10 million revolutions Linearity: \leq \pm 2%
Duty cycle at 20°C	EA 100	65%
	EA 200	100%
Conduit entry	M25 x 1.5	
Mechanical stop	Two adjustable screws	
Manual override	Automated declutching mechanism	
Materials	Steel, aluminium alloy, aluminium bronze, polycarbonate	
External coating	Dry powder polyester	
Weatherproof enclosure	IP67, NEMA 4 and 6	
Ambient temperature	-20°C to +70°C	
Ambient humidity	90% RH max (non-condensing)	
Anti-condensation heater	7 - 10W	
Vibration resistance	5 - 100 Hz	5g
	100 - 300 Hz	1g

Performance


Model	Max output torque	Stroke time (secs)		Max current	
		50 Hz	60 Hz	220V	110V
EA100	100 Nm	25	21	0.88A	1.7A
EA200	200 Nm	31	26	0.92A	1.9A

Mechanical

Model	Weight	Mounting		Drive interface ISO(5211) mm
		PCD (mm)	Thread	
EA100	16.6kg	102	M10	17 mm square
EA200	22kg	125	M12	22mm square

Dimensions

Dimensions in mm

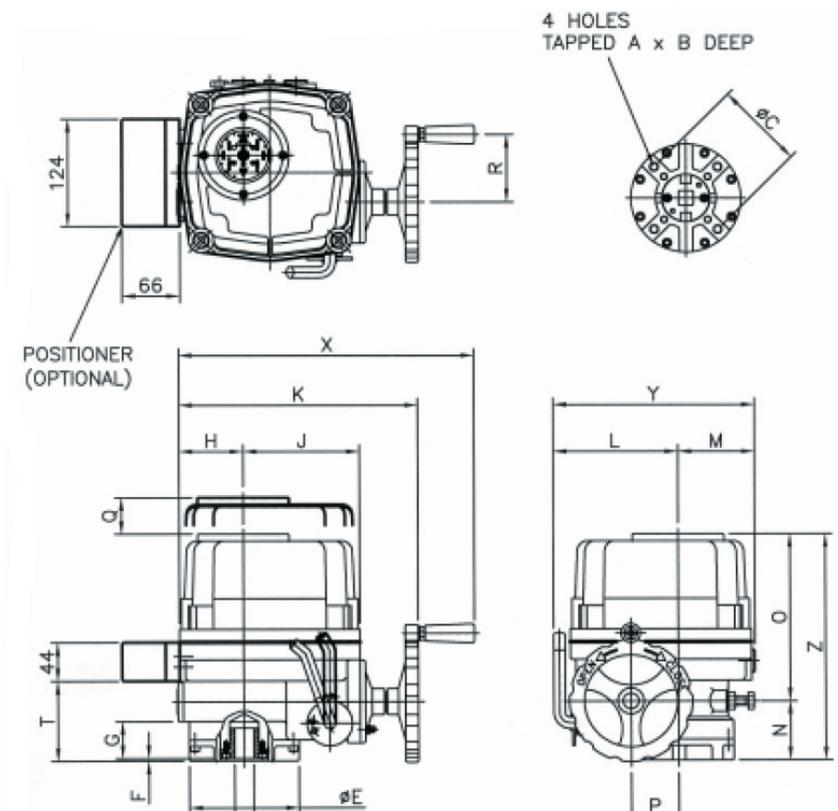

Model	Base ISO5211	A	B	C	E	F	G	H	J	K	L	M	N	O	P	Q	R	S	T	X	Y	Z
EA100	F10	M10	15	102	125	3	42	73	133	273	142	87	68	192	54	160	78	17	86	338	229	260
EA200	F12	M12	18	125	148	3	49	82	154	303	160	99	69	221	65	180	78	22	95	368	259	290

Optional 4 - 20mA positioner

The AMOT actuator/valve positioner is set by an industry standard 4-20mA position demand input signal, which drives a solid state motor drive circuit. Microprocessor based, the unit uses the signal from the position feedback potentiometer to accurately position the actuator, taking into account motor response time, and actuator overshoot.

Software configuration allows:

- 4-20mA output to be set for demand, position or error transmit
- selection of reverse or direct mode for CW or ACW = 4mA

- action on demand signal failure to be set as stationary, or move to 4mA or 20mA ends
- stroke time to be artificially increased by up to 100%
- end stop margin to be changed
- deadband to be changed

All components are encapsulated to withstand vibration, and an LED is fitted to the case to indicate fault conditions. An external error output is also included as standard for remote error indication.

Specification check list

Use the tables below to select the unique specification of your CompACT actuator.

Please select one characteristic from each section. Each characteristic is associated with a code that you will need to state when ordering.

Actuator type	Code	✓
CompACT actuator	EA	

Size/nominal torque	Code	✓
100 Nm	100	
200 Nm	200	

Shaft connection	Code	✓
17mm square (EA100 only)	17S	
22mm square (EA200 only)	22S	

Supply voltage	Code	✓
110V AC	110	
220V AC	220	

Features	Code	✓
Standard (1k Ohm potentiometer)	0	
5k Ohm potentiometer	1	
Standard with positioner port	2	
4-20mA electronic positioner with position retransmit (4mA at anti-clockwise)	A	
4-20mA electronic positioner with demand retransmit (4mA at anti-clockwise)	B	
4-20mA electronic positioner with position error output (4mA ref) (4mA at anti-clockwise)	C	
4-20mA electronic positioner with position error output (12mA ref) (4mA at anti-clockwise)	D	
As A but reverse acting (4mA at clockwise)	E	
As B but reverse acting (4mA at clockwise)	F	
As C but reverse acting (4mA at clockwise)	G	
As D but reverse acting (4mA at clockwise)	H	
Switched live control with position retransmit (4mA at anti-clockwise)	J	
As J but reverse acting (4mA at clockwise)	K	

Special Requirements	Code	✓
Standard	-AA	
Please contact us for any special requirements		
Notes		

Once you have made your selection, or if you need advice, please call us on:

+44(0)1284 762222

fax +44(0)1284 760256

email info@amot.com

Europe and Africa

AMOT
Western Way
Bury St Edmunds
Suffolk, IP33 3SZ
England

Tel +44 (0) 1284 762222
Fax +44 (0) 1284 760256
Email info@amot.com

AMOT Controls GmbH
Rondenbarg 25
22525 Hamburg
Germany

Tel +49 (0)40 8537 1298
Fax +49 (0)40 8537 1331
Email germany@amot.com

Asia and Australasia

AMOT Shanghai
Rm A8-671 Jiahua Business Center
808 Hongqiao Road
Shanghai 200030
China

Tel +86 (0) 21 6447 9708
Fax +86 (0) 21 6447 9718
Email shanghai@amot.com

AMOT Singapore
10 Eunos Road 8 #12-06
Singapore Post Centre
Singapore 408600

Tel +65 6293 4320
Fax +65 6293 3307
Email singapore@amot.com

Americas

AMOT USA
8824 Fallbrook Dr
Houston, TX 77064
USA

Tel +1 (281) 940 1800
Fax +1 (281) 668 8802
Email sales@amotusa.com