

## Round Belts (Round Belting)

- Cross-sections from 1/16" to 3/4", also most metric sizes (2mm to 18mm) and standard O-ring sizes.
- Any length above 3" cut length (depends on cord crosssection).
- Durometers: 60A, 70A, 75A, 76A, 80A, 83A, 85A, 88A, 90A, 92A, 95A, 100A, 53D
- Colors: clear, <u>orange</u>, red, <u>green</u>, <u>blue</u>, light blue, white, yellow, brown, black. Also see <u>Retro-Color process</u>
- Textures: smooth or <u>rough/matte</u> finish.
- Economical no tooling charge.
- Best resilience of any elastic material.
- Tough & durable.
- Highly resistant to cuts and abrasion.
- Non-marking.
- Won't fray.
- Fits round or V pulleys.
- Easily cleaned.
- Resistant to fuels and oils. (Non-Slip Belts)
- Most are Food Grade USDA/FDA approved.
- Some are detectable by metal detectors (Metal Detectable)
- Available with UV resistance
- Available in Anti Static (Static Dissipative)
- Available in Jungle or Nautical urethane

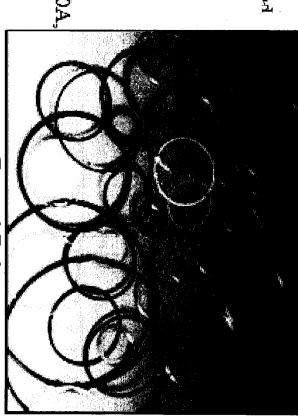

Round Belts



Lineshaft Round Belt