







RUBIN 335 H
4,0 - 5,5 kW (50 Hz)
4,6 - 6,3 kW (60 Hz)

Motor: Schutzart IP 55; Isolationsklasse F; serienmäßig mit Thermoschutzkontakt

	Artikel Nr.	kW	V	Hz	A	min ⁻¹	 *	mbar (V)	mbar (D)	dB(A)	kg
Drehstrom	1009164200	4,0	200-240 Δ	50	16,7	2900	*	310	260	74	56
			345-415 Y	50	9,7						
		4,6	220-275 Δ	60	17,6	3500		300	270	78	56
			380-480 Y	60	10,2						
	1009164300	5,5	200-240 Δ	50	22,5	2860	*	320	390	74	60
			345-415 Y	50	13,0						
		6,3	220-275 Δ	60	23,6	3500		340	370	78	60
			380-480 Y	60	13,6						
	1009164800	5,5	345-415 Δ	50	12,5	2880	—	320	390	74	60
		6,3	380-480 Δ	60	13,2	3500		330	370	78	60
	1009164500 (HT)	5,5	200-240 Δ	50	22,5	2900	*	390	440	74	60
			345-415 Y	50	13,0						
	6,3	220-275 Δ	60	23,6	3500		380	370	78	60	
		380-480 Y	60	13,6							
auf Anfrage (HT)	5,5	230 Δ	50	18,8	2860	—	390	420	74	60	
		400 Y	50	10,8							
IE3	6,3	265 Δ	60	18,0	3500		380	320	78	60	
		460 Y	60	10,4							




Technische Änderungen vorbehalten!

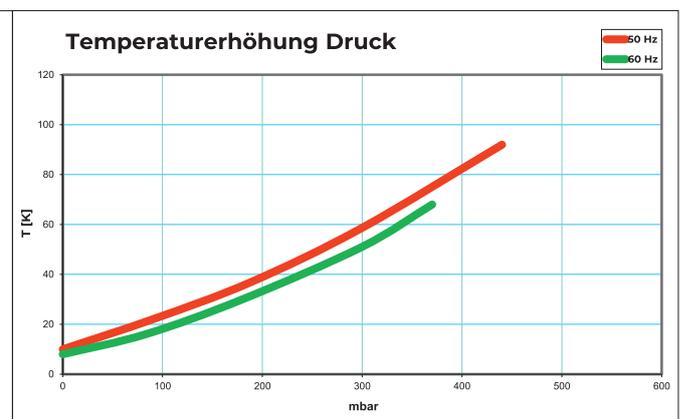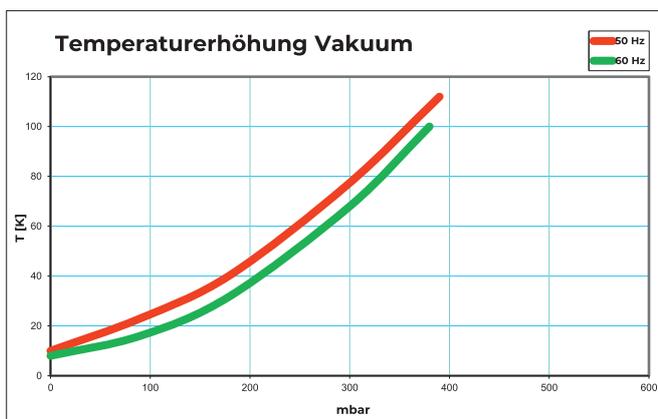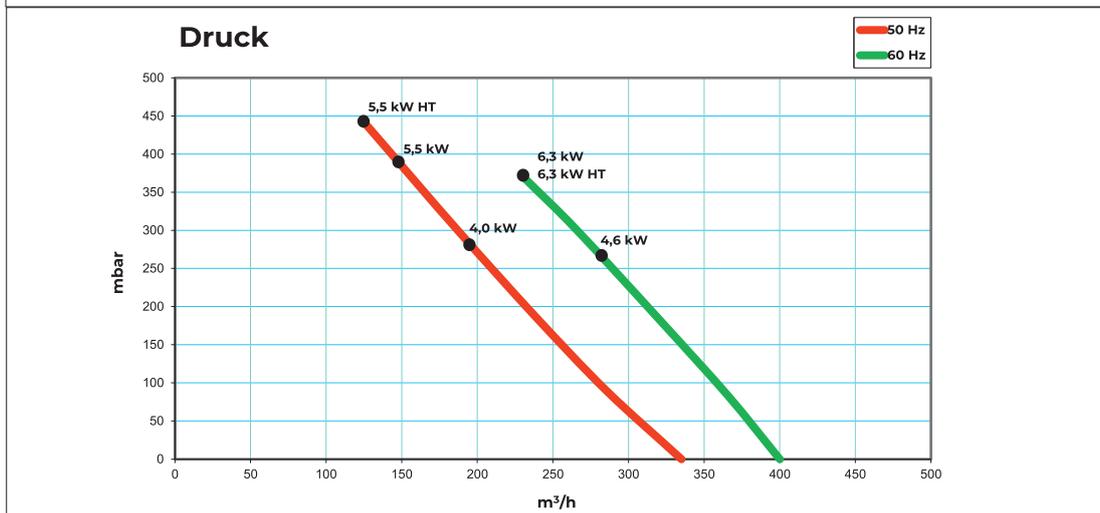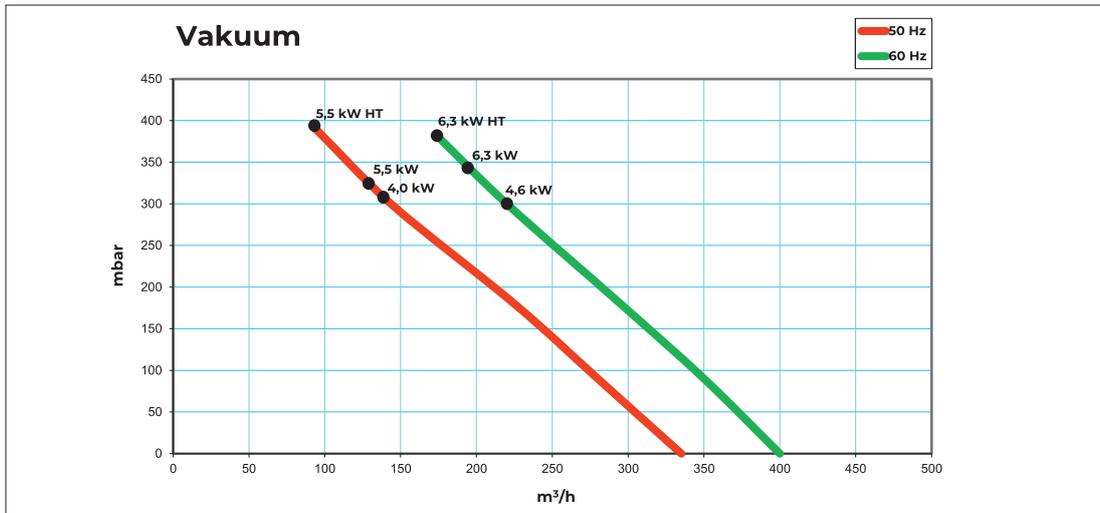

Die Kennlinien haben eine Toleranz von $\pm 10\%$ und beziehen sich auf freie atmosphärische Luft von 1 bar (abs.) und 20°C.

Technische Änderungen vorbehalten!

Abmessungen alle Abmessungen in mm

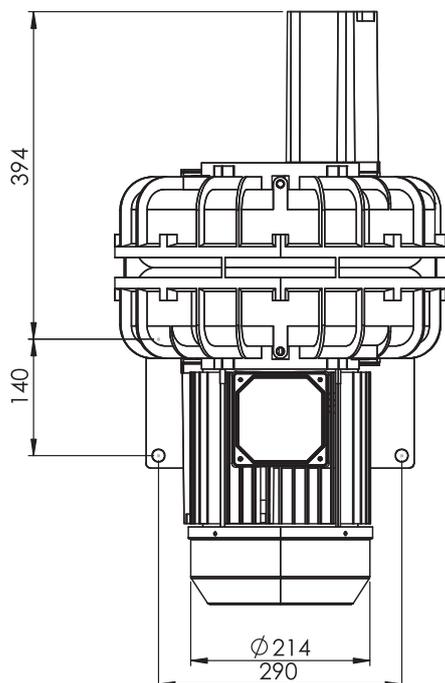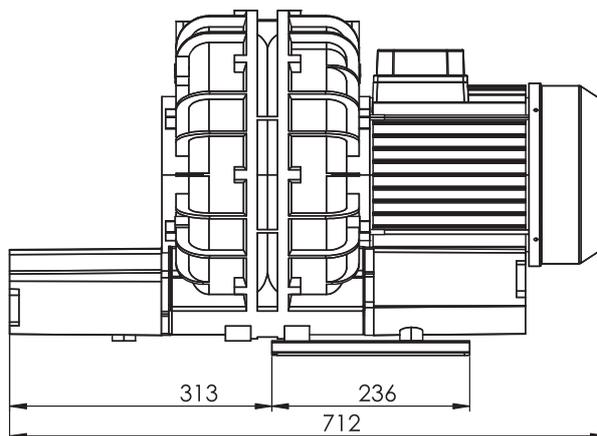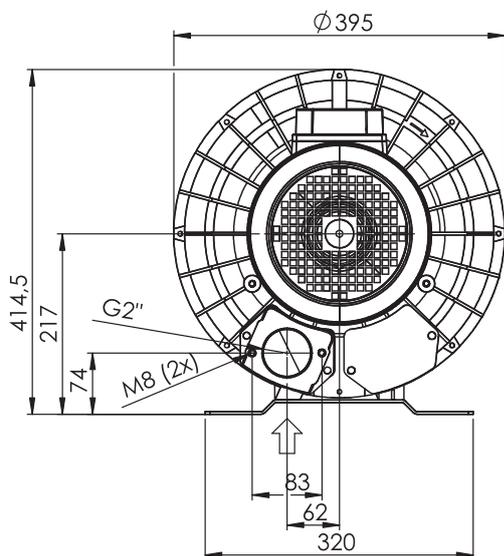

Technische Änderungen vorbehalten!