




Dimensional Drawing

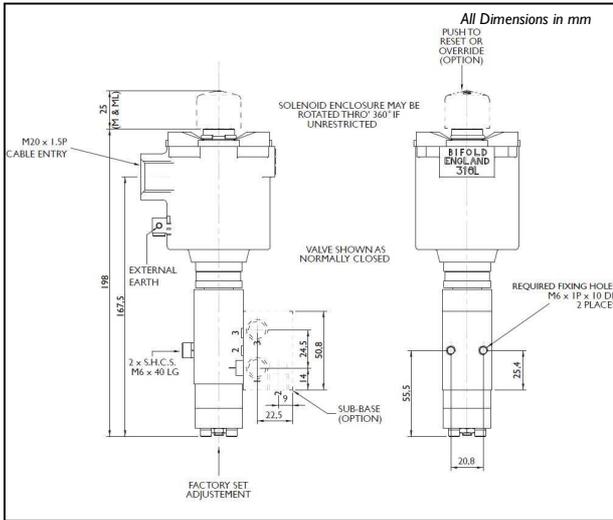


Schematic



Wiring



Rendering

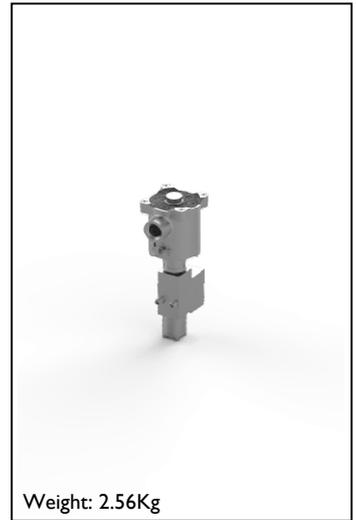

Certification



FP01/S2/M/32/NC/S/77A-24D/30/[M221]

FP01	1 litre per minute	Model Code
S2	Direct Acting, Spring Return, 518bar	Max Valve Pressure
M	Subbase mounting	Connections
32	3 way, 2 position	Valve Configuration
NC	Normally Closed	Valve Configuration
S	Nitrile -30°C to +130°C	O-ring Material
77	Ex d	Solenoid
A	ATEX/IECEx Dual Certified	Solenoid Approval
24D	24VDC	Voltage/Resistance
	Auto Reset	Override Options
30	3.0 Watts	Power
	M20 x 1.5 Cable Entry	Cable Entry
	Standard	Option
[M221]	1/4" Manifold	Manifold Option

FP01 /S2 /M /32 /NC /S /77 A -24D /30 /	[M221]	Model Number
--	---------------	---------------------

Solenoid T-Rating

Ex d IIC Gb	T4	T1 35°C	(-60°C ≤ Tamb ≤ +90°C)
Ex tb IIIC Db	T5	T1 100°C	(-60°C ≤ Tamb ≤ +55°C)
	T6	T85°C	(-60°C ≤ Tamb ≤ +40°C)

This is a bespoke datasheet. For further details on the complete range, please refer to catalogue: Direct Acting Solenoid Valves Model FP01 Ex d, Ex emb, Ex ia



Accuracy of information
We take care to ensure that product information in this catalogue is reasonably accurate and up-to-date. However, our products are continually developed and updated so to ensure accurate and up-to-date information please refer to the product catalogue issue list on our web site or contact a member of our sales team.

When selecting a product, the applicable operating system design must be considered to ensure safe use. The products function, material compatibility, adequate ratings, correct installation, operation and maintenance are the responsibilities of the system designer and user.

Quality Assurance
All Bifold products are manufactured to a most stringent QA programme to ensure that every product will give optimum performance and reliability. We are third party certified to BS EN ISO 9001:2008. Functional test certificates, letter of conformity and copies of original mill certificates, providing total traceability are available on request, to BS EN 10204 3.1 where available. We reserve the right to make changes to the specifications and design etc., without prior notice.

