



INSULATED CONDUCTOR SYSTEM U10



CONTENTS

| | | | |
|---|---|---|----|
| General Information | 2 | Compact Current Collector Set KDS2/40 | 10 |
| Technical Data | 4 | Compact Current Collectors Set KUFR2/40 | 11 |
| Joint Splice/Feed | 5 | Entry Funnel | 12 |
| Feed Terminal | 5 | Compact Current Collector KUFU25 | 13 |
| Isolating Assembly | 5 | Current Collector Brushes | 14 |
| Spacer Clip | 5 | Current Collector Springs..... | 14 |
| Expansion Section..... | 6 | Connecting Cables | 15 |
| Transfer Guides..... | 6 | Terminal Boxes..... | 16 |
| Anchor Bracket (aluminum) for Transfer Guide..... | 7 | Current Collector Brush Wear Indicator | 16 |
| Standard Compact Hangers | 8 | Installation Tools..... | 17 |
| Locating Clamp | 8 | Application Questionnaire | 19 |
| Customer Specific Compact Hangers..... | 9 | | |



Fig.1 VDE test finger

GENERAL INFORMATION

The U10 Insulated Conductor System has been designed in accordance with VDE 0100. It complies with current conductor system safety requirements and protects against accidental human contact as stipulated by VDE 0470, Part 1 (DIN EN 60526), (Protection classification IP 21).

Fig. 1 illustrates that the VDE test “finger” cannot make contact with current carrying components.

Compact collectors provide accidental contact protection only when the contact brushes are correctly and fully inside the conductors and covered by the insulating shroud. Conductor systems located within reach of personnel, and with collectors exiting the conductors during operation, must have barriers or shut-off switches installed to prevent accidental contact. This is required only for conductor systems with operating voltage above 25 VAC or 60V DC.

U 10 Conductor System is approved for indoor installations only.

Conductor systems may consist of any number of conductors. Space requirements are minimal. Contact opening at either downward or side-ways orientation is possible.

Standard length for conductor sections is 6m, shorter sections are available.

The standard PE conductor is marked with a continuous yellow stripe at the insulating shroud. The PE-VP ground conductor has a specifically shaped profile which reliably prevents the PE-VP collector from entering a phase conductor; thus, the support structure cannot be inadvertently electrified.

APPROVALS

UL Certification. Please consult us when ordering

COMPACT HANGERS

Compact hangers are used for conductor installation and will also provide and maintain the defined 14 mm phase distance. Hanger center distance is max. 0.6 m at straight sections, 0.3 m at curved sections.

JOINT SPLICE/FEED

Joint Splice/Feeds are used to mechanically and electrically connect U10 conductor sections. The included Joint Splice cap protects personnel from accidentally making contact when the system is under current. Each Joint Splice/Feed can compensate for section expansion/contraction up to 4 mm.

FEED TERMINALS

A feed connection is possible at every Joint Splice. Also, each Isolating Assembly and Transfer Guide can serve as a feed location when a Feed Clip is installed. When additional feed points within a conductor section are required, Feed Terminals (inline only) may be installed.

TRANSFER GUIDES

Transfer guides serve as protection of the conductor end as well as a mechanical system separation. They also facilitate reliable passage of collector brushes at movable track sections such as track switches and lift stations. Installed with an aluminum Anchor Bracket (BFU), Transfer Guides lock the conductor ends in place at the support track thus creating a system fixpoint.

ISOLATING ASSEMBLIES (AIR GAP)

Isolating assemblies interrupt the electrical current flow in a conductor. To utilize Current Collectors with the operational task to switch current on/off is only permitted when using low energy control current. For control function, feed sections, maintenance sections etc. we are supplying Isolating Assemblies with or without SE Feed Clip.

CURVES

U10 Insulated Conductors can be bend horizontally or vertically. A Curve Bending Tool is available to produce curves at an installation site.

CURRENT COLLECTORS

Current Collectors are manufactured using impact resistant synthetic material and stainless steel components. Copper graphite or carbon contact brushes are used.

The length of the Current Collector cable cannot exceed 3m if the installed overload protection is not rated for the current capacity of

the cable. See also DIN VDE 0100, Part 430 and DIN EN 60204-32. Connecting cables as supplied are sufficiently dimensioned for the listed nominal current. For installation variation reduction factors, as with DIN VDE 0298-4, must be observed.

DIN EN 60204-1 and DIN-EN 60204-2 stipulate that the reliability of PE systems using conductor brushes must be ensured. Doubling the PE Collector is a practical and simple solution to achieve compliance.

INDUSTRIAL DESIGNATIONS

DIN — German Institute for Standards

EN — European Standard

ISO — International Organization for Standardization

IEC — International Electrotechnical Commission

VDE — German Electrotechnical Association

IP — International Protection type and classification

UL — Underwriters Laboratories

SAFETY NOTE

A safety distance of min. (0.5m) between Conductor / Current Collector arrangement and other moving or fixed equipment must be kept to prevent accidental injury of personnel!

INSULATING SHROUD VALUES (ELECTRICAL)


| Type | Dielectric insulation DIN 53481 | Specific resistance IEC 60093 | Surface resistivity IEC 60093 | Leakage path resistance IEC 60112 |
|-------------------------|------------------------------------|----------------------------------|----------------------------------|--------------------------------------|
| Standard shroud, green | > 25 kV/mm | > 1×10^{16} Ohm x cm | $2,1 \times 10^{15}$ Ohm | CTI 400 – 1,1 |
| High temp. shroud, gray | > 25 kV/mm | > 1×10^{14} Ohm x cm | $2,1 \times 10^{15}$ Ohm | CTI 400 – 1,1 |

INSULATING SHROUD VALUES (MECHANICAL)

| Type | Bending rigidity ISO 178 | Tensile strength ISO 527 | UV resistance | max. relative humidity | Ambient temperature range ⁽¹⁾ | Flame test |
|-------------------------|-----------------------------|-----------------------------|----------------------|------------------------|--|--|
| Standard shroud, green | 74 - 85 N/mm ² | 44 - 55 N/mm ² | Xenon test > 1500 | < 100 % | - 30 °C to + 55 °C | Flame resitant, self extinguishing, UL 94 V0 |
| High temp. shroud, gray | 90 - 100 N/mm ² | 47 - 65 N/mm ² | Xenon test > 1500 | < 100 % | - 30 °C to + 85 °C | Flame resitant, self extinguishing, UL 94 V0 |

TECHNICAL DATA

CONDUCTOR SECTION

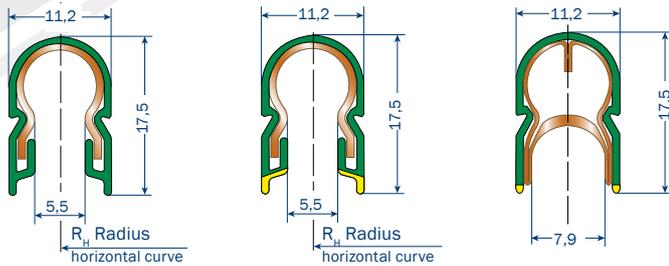

PH-Standard

PE-Standard

PE-VP Standard

CONDUCTOR SPACING

Standard = 14 mm

BENDING CONDUCTORS

Without pre-bending $\infty \geq R \geq 5000$ mm

At site:

Horizontal curves $5000 \text{ mm} \geq R \geq 750 \text{ mm}$

Inward/outward facing curves $5000 \text{ mm} \geq R \geq 750 \text{ mm}$

Curves $R \leq 750$ mm pls. inquire.

CONDUCTOR CODE

U = Unipole insulated conductor

10 = Shroud size

25 = Conductor cross section (mm²)

C = Copper conductor

E = Stainless steel conductor

CONDUCTOR LENGTH

6 m (19.6") standard section,
shorter sections available

SUPPORT SPACING

Straight sections 0,6 m (2')

Curves 0,3 m (1')

APPROVAL

Indoor installations only

PHASE (STANDARD)

| Type U10 Standard green shroud | Weight kg/m | Order No. Phase ⁽¹⁾ |
|--------------------------------|-------------|--------------------------------|
| U10/25C-....PH-B | 0,267 | 167 00 • |
| U10/25E-....PH-B | 0,246 | 167 02 • |

PE (STANDARD)

| Type U10 Standard green shroud | Weight kg/m | Order No. PE ⁽¹⁾ |
|--------------------------------|-------------|-----------------------------|
| U10/25C-....PE-A | 0,267 | 167 06 • |
| U10/25E-....PE-A | 0,246 | 167 08 • |

PE-VP (STANDARD)

| Type U10 Standard green shroud | Weight kg/m | Order No. PE-VP ⁽¹⁾ |
|----------------------------------|-------------|--------------------------------|
| U10/25C-....VP-A | 0,267 | 143 19 • |
| U10/25E-....VPG-A ⁽⁴⁾ | 0,267 | 143 31 • |

PHASE (HIGH TEMP. SHROUD)

| Type U10 high temp. gray shroud | Weight kg/m | Order No. Phase ⁽¹⁾ |
|---------------------------------|-------------|--------------------------------|
| U10/25C-....PH-D85 | 0,267 | 167 03 • |
| U10/25E-....PH-D85 | 0,246 | 167 05 • |

PE (HIGH TEMP. SHROUD)

| Type U10 high temp. gray shroud | Weight kg/m | Order No. PE ⁽¹⁾ |
|---------------------------------|-------------|-----------------------------|
| U10/25C-....PH-C85 | 0,267 | 167 09 • |
| U10/25E-....PE-C85 | 0,246 | 167 11 • |

PE-VP (HIGH TEMP. SHROUD)

| Type U10 high temp. gray shroud | Weight kg/m | Order No. PE-VP ⁽¹⁾ |
|------------------------------------|-------------|--------------------------------|
| U10/25C-....VP-C85 | 0,267 | 143 20 • |
| U10/25C-....VPG-C85 ⁽⁴⁾ | 0,246 | 143 32 • |

CONDUCTOR ENGINEERING DATA

| Type | leakage distance shroud mm | max. nominal Voltage ⁽³⁾ | max. continuous current A | resistance Ohm/1000m | impedance ⁽²⁾ Ohm/1000m |
|----------|----------------------------|-------------------------------------|---------------------------|----------------------|------------------------------------|
| U10/25 C | 30 | 690 | 100 | 0,744 | 0,748 |
| U10/25 E | 30 | 690 | 10 | 31,328 | 31,328 |

SELECTION OF CONDUCTORS

Conductor selection must consider required current capacity and existing environmental conditions.

- U10/25 C Conductor System with copper conductor for main current, control signal and data
- U10/25 E Conductor System with stainless steel conductor for control signal and data transmission at corrosive environments

(1) Type designation to be completed, e.g. U10/25E-**6000**PH-B for 6 m phase, order number 167 026

The four-digit number (printed bold) at the type designation indicates the length of the conductor section.

(2) Based on 14 mm conductor spacing at 50 Hz

(3) Not with UL certification $U_{UL} = 600V$

(4) Only for curves facing inward

• The last numeral of the order number indicates the length of the conductor section in meters. Accordingly complete the order number with 1, 2, 3, 4, 5 or 6.

JOINT SPLICE/FEED

Max. 2 x 40 A continuous current

Compensates for up to 4 mm section expansion/contraction caused by temperature fluctuations

Connecting cables not included, please order from page 15




| Type | Weight kg | Order No. |
|--------------|-----------|-----------|
| VM-UEV10/C | 0,026 | 165 006 |
| VM-UEV10VP/C | 0,026 | 143 213 |

FEED TERMINAL (INLINE ONLY)

Max. 2 x 50 A continuous current

Connecting cable not included, please order from page 15

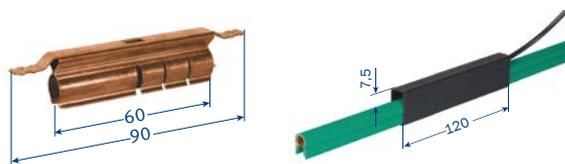

| Type | Weight kg | Order No. |
|------------|-----------|-----------|
| ES-UES10 | 0,026 | 165 212 |
| ES-UES10VP | 0,026 | 143 214 |


ISOLATING ASSEMBLY (AIR GAP)

Max. 40 A continuous current

Two halves are joined during installation

Feed Clip SE 10 with tab connector 6,3 x 0,8mm (max. continuous current 40 A), at least one additional Compact

Hanger required for each Isolating Assembly.

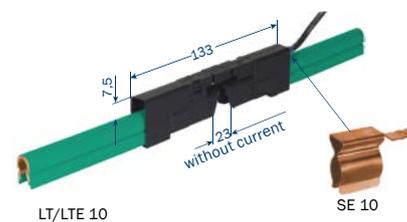

| Type | Description | Weight kg | comprising | Order No. |
|--------------|-------------|-----------|------------------------------------|-----------|
| ST-LT/LT10 | | 0,017 | 2 x LT/U 10 | 165 025 |
| ST-LT/LTE10 | | 0,021 | 2 x LT/U 10 1 x Feed clip SE 10 | 165 114 |
| ST-LTE/LTE10 | | 0,025 | 2 x LT/U 10 2 x Feed clip SE 10 | 165 026 |

SPACER CLIP

to provide support for Isolating Assembly by filling gap between Isolating Assembly and web of aluminum monorail track at 16,5 mm system height⁽¹⁾.



| Type | Weight kg | Order No. |
|--------------|-----------|-----------|
| EU-DK10/16,5 | 0,002 | 165 682 |

(1) System height = distance contact surface to back of Compact Hanger (at web of monorail track)

EXPANSION SECTION

single conductor, to be completed at installation site

Expansion capability of Expansion Section must equal the max. expansion capability of the EMS track.

Two Fix Points are required with each Expansion Section. Please order as required by the EMS track layout.

An additional Compact Hanger is required for each 15 mm expansion capability. Please add to your order as required.

Prefinished, complete Expansion Sections are also available as a 800mm long section.

STANDARD



| Type | Weight kg | Expansion | Order No. |
|---------------|-----------|-------------|-----------|
| VM-UDV10/C-30 | 0,052 | up to 30 mm | 166 542 |
| VM-UDV10/C-45 | 0,075 | up to 45 mm | 166 543 |
| VM-UDV10/C-60 | 0,104 | up to 45 mm | 166 544 |

PE-VP


| Type | Weight kg | Expansion | Order No. |
|-----------------|-----------|-------------|-----------|
| VM-UDV10VP/C-30 | 0,052 | up to 30 mm | 143 356 |
| VM-UDV10VP/C-45 | 0,078 | up to 45 mm | 143 357 |
| VM-UDV10VP/C-60 | 0,104 | up to 60 mm | 143 358 |

TRANSFER GUIDES

max. vertical and horizontal offset ± 3 mm respective

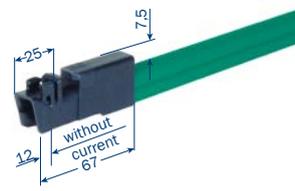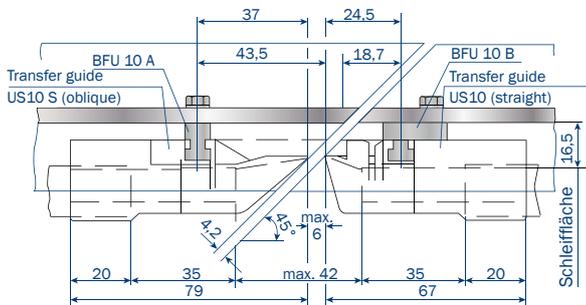

without Feed Clip: US 10

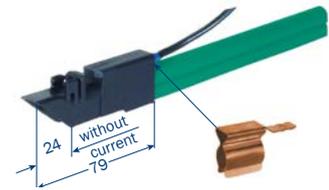

with Feed Clip: USE 10 S
(tab connector 6.3 x 0.8 mm)

TRANSFER GUIDE

max. 40 A continuous current

| Type | Weight kg/m | Version | Feed Clip | Order No. |
|-----------|-------------|----------|-----------|-----------|
| MU-US10 | 0,008 | straight | w/o | 165 008 |
| MU-US10S | 0,008 | oblique | w/o | 165 009 |
| MU-USE10 | 0,012 | straight | with | 165 010 |
| MU-USE10S | 0,012 | oblique | with | 165 011 |

TRANSFER GUIDE FOR PE-VP


max. 40 A continuous current



w/o Feed Clip: US 10 PE-VP



w/o Feed Clip: US 10 SP



with Feed Clip: USE 10 S-VP
(tab connector 6.3 x 0.8 mm)


| Type | Weight kg/m | Version | Feed Clip | Order No. Phase + PE |
|---------------|-------------|------------------|-----------|-------------------------|
| MU-US10-VP | 0,007 | straight | w/o | 143 208 |
| MU-US10S-VP | 0,007 | oblique | w/o | 143 210 |
| MU-US10SP-VP | 0,008 | oblique positive | w/o | 143 212 |
| MU-USE10-VP | 0,011 | straight | with | 143 207 |
| MU-USE10S-VP | 0,011 | oblique | with | 143 209 |
| MU-USE10SP-VP | 0,012 | oblique positive | with | 143 211 |

ANCHOR BRACKET (ALUMINUM) FOR TRANSFER GUIDES

to be bolted to the track

Two holes to be drilled through the EMS track to screw on the Anchor Bracket from the back.

Kit comprises: 1 x Anchor Bracket, 2 x hex screws M5 with lock washer, 2 x roll pins 2 x 20.

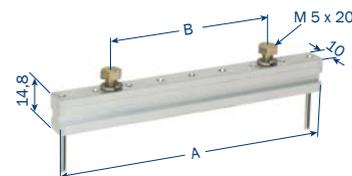

BFU 10A


for system height⁽¹⁾ = 16.5 mm

| Type | No. of conductors | A mm | B mm | Weight kg | Order No. |
|----------------------------|-------------------|------|------|-----------|-----------|
| MU-BFU10H4/16,5/14-59/42 | 1 - 4 | 59 | 42 | 0,032 | 144 422 |
| MU-BFU10H6/16,5/14-90/42 | 1 - 6 | 90 | 42 | 0,040 | 144 499 |
| MU-BFU10H8/16,5/14-118/70 | 1 - 8 | 118 | 70 | 0,048 | 165 168 |
| MU-BFU10H10/16,5/14-143/70 | 1 - 10 | 143 | 70 | 0,056 | 165 176 |

BFU 10B

to be used when EMS track has been cut obliquely (see drawing page 6).


for system height⁽¹⁾ = 16.5 mm

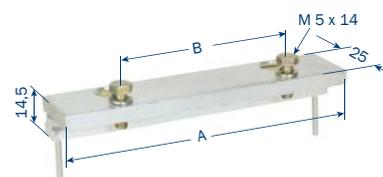

| Type | No. of conductors | A mm | B mm | Weight kg | Order No. |
|-------------------------------|-------------------|------|------|-----------|-----------|
| MU-BFU10H4/16,5/14-59/42-25 | 1 - 4 | 59 | 42 | 0,053 | 144 419 |
| MU-BFU10H6/16,5/14-90/42-25 | 1 - 6 | 90 | 42 | 0,065 | 143 982 |
| MU-BFU10H8/16,5/14-118/70-25 | 1 - 8 | 118 | 70 | 0,077 | 165 272 |
| MU-BFU10H10/16,5/14-143/70-25 | 1 - 10 | 143 | 70 | 0,089 | 165 274 |

BFU 10

for system height⁽¹⁾ = 10,5 mm

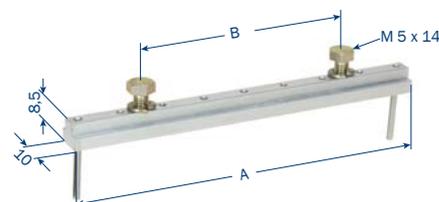


| Type | No. of conductors | A mm | B mm | Weight kg | Order No. |
|-------------------------|-------------------|------|------|-----------|-----------|
| MU-BFU10H4/10/14-62/42 | 1 - 4 | 62 | 42 | 0,022 | 144 022 |
| MU-BFU10H6/10/14-90/42 | 1 - 6 | 90 | 42 | 0,026 | 143 983 |
| MU-BFU10H8/10/14-118/70 | 1 - 8 | 118 | 70 | 0,030 | 165 115 |

BFU 10V

for system height⁽¹⁾ = 10.5 mm

Socketed head screws inserted at front of EMS track. Anchor Bracket kit consists of:

1 x Anchor Bracket, 2 x socket head screws M5, 2 x roll pins.

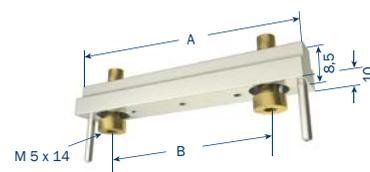


| Type | No. of conductors | A mm | B mm | Weight kg | Order No. |
|-------------------------|-------------------|------|------|-----------|-----------|
| MU-BFU10V4/10/14-59/42 | 1 - 4 | 59 | 42 | 0,015 | 144 355 |
| MU-BFU10V6/10/14-90/42 | 1 - 6 | 90 | 42 | 0,021 | 144 513 |
| MU-BFU10V8/10/14-118/70 | 1 - 8 | 118 | 70 | 0,026 | 144 514 |

(1) System height = distance contact surface to back of Compact Hanger (at web of monorail)

STANDARD COMPACT HOLDER

up to 10 conductors

These Compact Hangers may be combined to support any number of conductors.

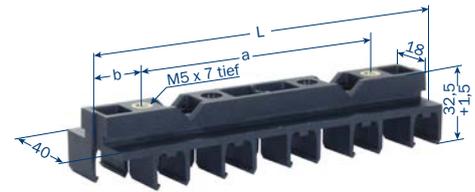

| Type | max. conductors | L | a | b | Weight kg | Order No. |
|---------------------------|-----------------|-----|-----|------|-----------|-----------|
| AH-KA10L-2/16,5-N-PA-14 | 2 | 29 | 0 | 20,5 | 0,012 | 142 072 |
| AH-KA10L-4/16,5-10N-PA-14 | 4 | 57 | 42 | 7,5 | 0,024 | 142 073 |
| AH-KA10L-6/16,5-10N-PA-14 | 6 | 85 | 42 | 21,5 | 0,033 | 142 757 |
| AH-KA10L-8/16,5-10N-PA-14 | 8 | 113 | 42 | 35,5 | 0,045 | 142 075 |
| AH-KA10L-10/16,5-N-PA-14 | 10 | 141 | 100 | 20,5 | 0,056 | 142 076 |

COMPACT HOLDER KA10 (USED WITH SCREWS)

6 conductor + SMGM



| Type | max. conductors | L | Weight kg | Order No. |
|------------------------------|-----------------|-----|-----------|------------|
| AH-KA10-4/10,5-UNI-PA-SMG-14 | 4 | 100 | 0,027 | 144 354 |
| AH-KA10-6/10,5-UNI-PA-SMG-14 | 6 | 128 | 0,036 | 100 102 11 |

LOCATING CLAMPS

2 ea. USK Location Clamps are required for each fix point



Illustration shows positioning of the two Locating Clamps at a Compact Hanger

LOCATING CLAMP STANDARD

| Type | Weight kg | Order No. |
|-------|-----------|-----------|
| USK10 | 0,006 | 165 645 |





Illustration shows positioning of the two Locating Clamps at a Compact Hanger

LOCATING CLAMP PE-VP

| Type | Weight kg | Order No. |
|-----------|-----------|-----------|
| USK10A-VP | 0,001 | 2823268 |

COMPACT HANGERS (CUSTOMER SPECIFIC)

Engineered and manufactured to fit customer specific EMS track

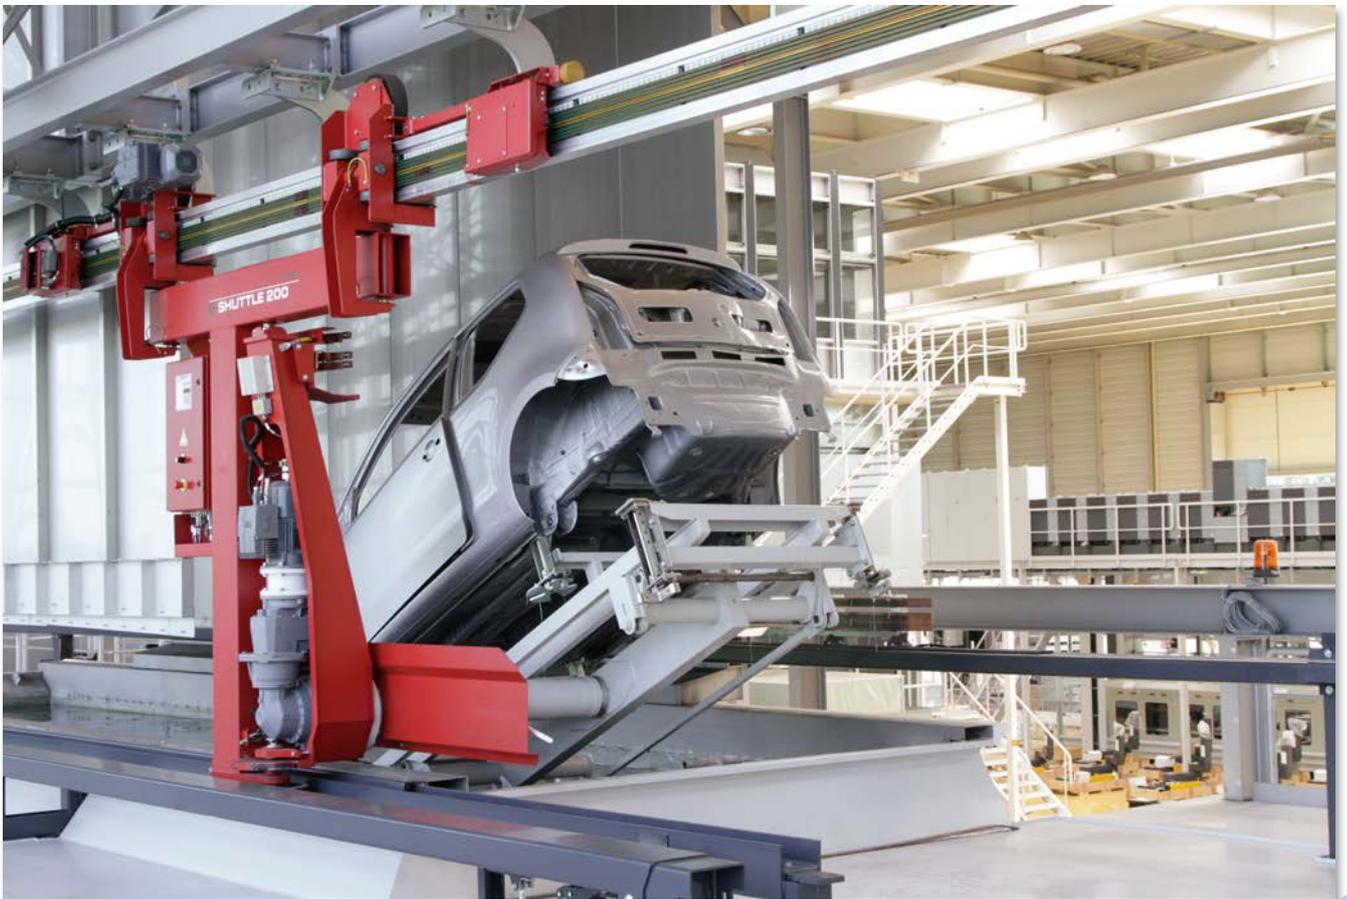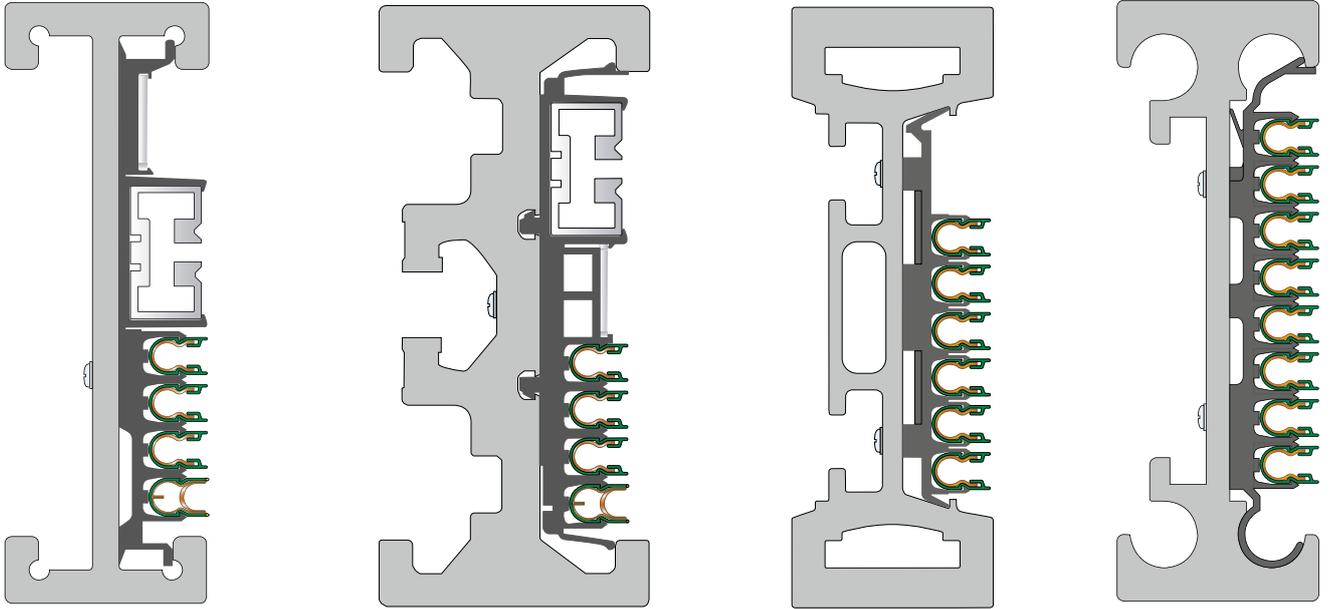

COMPACT COLLECTOR SETS

KDS2/40

PE-VP for EMS installations

with 1 x 0.5 m connecting cable type WFLA 2,5

max. current: 1 connecting cable 2.5 mm² 25 A

2 connecting cables 2.5 mm² 40 A

Stroke: ± 15 mm


Swivel: ± 15 mm

Contact pressure: approx. 3.5 N per contact brush

Connecting cable: 2.5 mm² type WFLA 2,5 high flex included

PE standard at No. 4 position, variations are possible.

PE makes contact first when entering conductors.

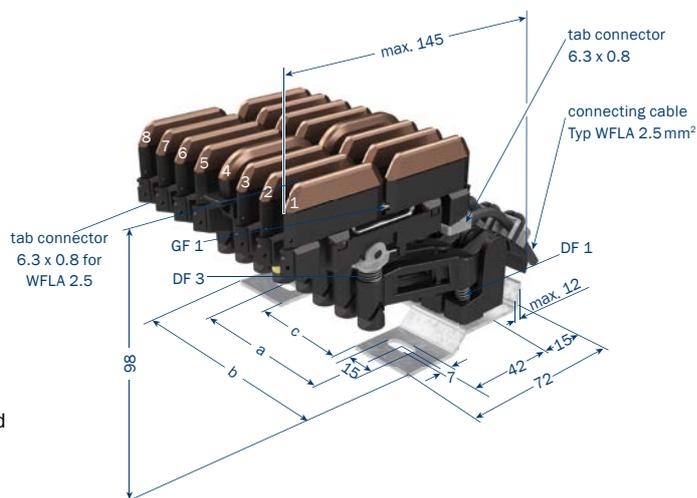

| Type | No. of cond. | Dim. a mm | Dim. b mm | Dim. c mm | Weight kg | Base plate | Order No. | |
|--|--------------|-----------|-----------|-----------|-----------|------------------------|--------------|------------------|
| | | | | | | | with PE-VP | with PE Standard |
| SA-KDS2/40/4/14VP0,5/4/4 | 4 | 28 | 62 | - | 0,428 | 4 cond. | 143 277 | - |
| SA-KDS2/40/4/14HS0,5/4/4 | 4 | 28 | 62 | - | 0,428 | 4 cond. | - | 168 082 |
| SA-KDS2/40/5/14VP0,5/4/6/6 | 5 | 56 | 90 | - | 0,549 | 6 cond. (No. 6 open) | 143 332 | - |
| SA-KDS2/40/5/14HS0,5/4/6/6 | 5 | 56 | 90 | - | 0,549 | 6 cond. (No. 6 open) | - | 168 083 |
| SA-KDS2/40/6/14VP0,5/4/6 | 6 | 56 | 90 | - | 0,637 | 6 cond. | 143 219 | - |
| SA-KDS2/40/6/14HS0,5/4/6 | 6 | 56 | 90 | - | 0,637 | 6 cond. | - | 168 084 |
| SA-KDS2/40/7/14VP0,5/4/8/8 | 7 | 80 | 118 | 53 | 0,744 | 8 cond. (No. 8 open) | 143 377 | - |
| SA-KDS2/40/7/14HS0,5/4/8/8 | 7 | 80 | 118 | 53 | 0,744 | 8 cond. (No. 8 open) | - | 168 085 |
| SA-KDS2/40/8/14VP0,5/4/8 | 8 | 80 | 118 | 53 | 0,832 | 8 cond. | 143 220 | - |
| SA-KDS2/40/8/14HS0,5/4/8 | 8 | 80 | 118 | 53 | 0,832 | 8 cond. | - | 168 086 |
| SA-KDS2/40/9/14VP0,5/4/10/10 | 9 | 80 | 156 | 53 | 0,959 | 10 cond. (No. 10 open) | 143 378 | - |
| SA-KDS2/40/9/14HS0,5/4/10/10 | 9 | 80 | 156 | 53 | 0,959 | 10 cond. (No. 10 open) | - | 168087 |
| SA-KDS2/40/10/14VP0,5/4/10 | 10 | 80 | 156 | 53 | 1,047 | 10 cond. | 143 379 | - |
| SA-KDS2/40/10/14HS0,5/4/10 | 10 | 80 | 156 | 53 | 1,047 | 10 cond. | - | 168 088 |
| Single conductor available with 0.5 m connecting cable | | | | | | | Phase, black | PE, yellow |
| SA-KDS2/40/04PH-88/15-0,5 | | | | | 0,091 | without | 168 073 | - |
| SA-KDS2/40/30VP-79/15-0,5 | | | | | 0,105 | without | - | 143 218 |
| SA-KDS2/40/04PE-88/15-0,5 | | | | | 0,090 | without | - | 168 074 |

CURRENT COLLECTOR SETS (TRAILING UNIT)

Single conductor on base plate. PE standard at No. 4 position, variations possible!

| Type | Dim. a mm | Dim. b mm | Dim. c mm | Weight kg | Base plate | Order No. PE-VP | Order No. PE |
|----------------------------------|-----------|-----------|-----------|-----------|------------|-----------------|--------------|
| SA-KDS2/40/1/14VP0,5/4/4/1-3 | 28 | 62 | - | 0,164 | 4 cond. | 143 361 | - |
| SA-KDS2/40/1/14HS0,5/4/4/1-3 | 28 | 62 | - | 0,164 | 4 cond. | - | 168 079-D |
| SA-KDS2/40/1/14VP0,5/4/6/1-3U5-6 | 56 | 90 | - | 0,197 | 6 cond. | 143 369 | - |
| SA-KDS2/40/1/14HS0,5/4/6/1-3U5-6 | 56 | 90 | - | 0,197 | 6 cond. | - | 167 454 |
| SA-KDS2/40/1/14VP0,5/4/8/1-3U5-8 | 80 | 118 | 53 | 0,216 | 8 cond. | 143 635 | - |
| SA-KDS2/40/1/14HS0,5/4/8/1-3U5-8 | 80 | 118 | 53 | 0,216 | 8 cond. | - | 167 830 |

KUFR2/40

for installations requiring bi-directional travel

with 1 x 0.5 m connecting cable type WFLA 2,5

max. current: 1 connecting cable 2.5 mm² 25 A
2 connecting cables 2.5 mm² 40 A

Stroke: ± 15 mm

Swivel: ± 15 mm


Contact pressure: approx. 3.5 N per contact brush

Connecting cable: 2.5 mm² type WFLA 2,5

Length: 0.5 m, high flex included

PE standard at No. 4 position, variations are possible. Dimensions of base plate see

KDS2/40. PE makes contact first when entering conductors.

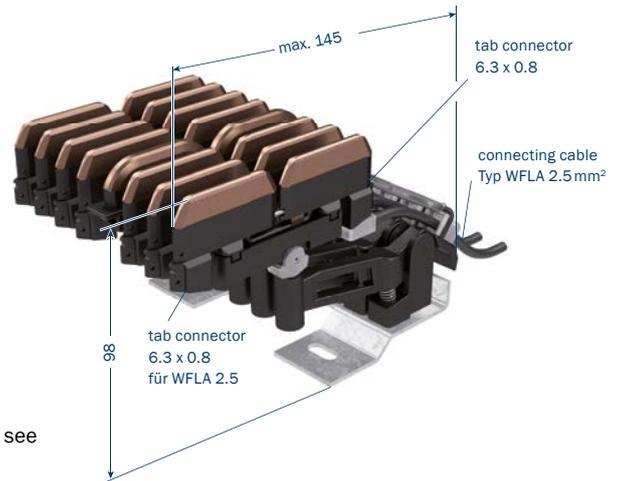

| Type | No. of cond. | Weight kg | Base plate | Order No. | |
|---|--------------|-----------|------------------------|---------------------|-------------------|
| | | | | with PE-VP | with PE-Standard |
| SA-KUFR2/40/4/14VP0,5/4/4 | 4 | 0,448 | 4 cond. | 144 474 | - |
| SA-KUFR2/40/4/14HS0,5/4/4 | 4 | 0,448 | 4 cond. | - | 165 927 |
| SA-KUFR2/40/5/14VP0,5/4/6/6 | 5 | 0,573 | 6 cond. (No. 6 open) | 144 475 | - |
| SA-KUFR2/40/5/14HS0,5/6/6 | 5 | 0,573 | 6 cond. (No. 6 open) | - | 165 928 |
| SA-KUFR2/40/6/14VP0,5/4/6 | 6 | 0,666 | 6 cond. | 144 476 | - |
| SA-KUFR2/40/6/14HS0,5/6 | 6 | 0,666 | 6 cond. | - | 165 929 |
| SA-KUFR2/40/7/14VP0,5/4/8/8 | 7 | 0,779 | 8 cond. (No. 8 open) | 144 478 | - |
| SA-KUFR2/40/7/14HS0,5/8/8 | 7 | 0,779 | 8 cond. (No. 8 open) | - | 165 930 |
| SA-KUFR2/40/8/14VP0,5/4/8 | 8 | 0,872 | 8 cond. | 144 479 | - |
| SA-KUFR2/40/8/14HS0,5/8 | 8 | 0,872 | 8 cond. | - | 165 931 |
| SA-KUFR2/40/9/14VP0,5/4/10/10 | 9 | 1,004 | 10 cond. (No. 10 open) | 144 480 | - |
| SA-KUFR2/40/9/14HS0,5/10/10 | 9 | 1,004 | 10 cond. (No. 10 open) | - | 165 932 |
| SA-KUFR2/40/10/14VP0,5/4/10 | 10 | 1,097 | 10 cond. | 144 481 | - |
| SA-KUFR2/40/10/14HS0,5/10 | 10 | 1,097 | 10 cond. | - | 165 933 |
| Single conductor available with 0.5 m connecting cable | | | | Phase, black | PE, yellow |
| SA-KUFR2/40/20PH-88/15-0,5 | | 0,093 | | 165 955 | - |
| SA-KUFR2/40/20PE-88/15-0,5 | | 0,091 | | - | 165 956 |
| SA-KUFR2/40/04VP-79/15-0,5 | | 0,105 | | - | 143 776 |

CURRENT COLLECTOR SETS (TRAILING UNIT)

Single conductor on base plate. PE standard at No. 4 position, variations possible!

| Type | Dim. a mm | Dim. b mm | Dim. c mm | Weight kg | Base plate | Order No. PE-VP | Order No. PE |
|-----------------------------------|-----------|-----------|-----------|-----------|------------|-----------------|--------------|
| SA-KUFR2/40/1/14VP0,5/4/4/1-3 | 28 | 62 | - | 0,164 | 4 cond. | 143 774 | - |
| SA-KUFR2/40/1/14HS0,5/4/4/1-3 | 28 | 62 | - | 0,164 | 4 cond. | - | 166 491 |
| SA-KUFR2/40/1/14VP0,5/4/6/1-3U5-6 | 56 | 90 | - | 0,197 | 6 cond. | 143 836 | - |
| SA-KUFR2/40/1/14HS0,5/4/6/1-3U5-6 | 56 | 90 | - | 0,197 | 6 cond. | - | 167 573 |
| SA-KUFR2/40/1/14VP0,5/4/8/1-3U5-8 | 80 | 118 | 53 | 0,216 | 8 cond. | 144 482 | - |
| SA-KUFR2/40/1/14HS0,5/4/8/1-3U5-8 | 80 | 118 | 53 | 0,216 | 8 cond. | - | 167 661 |

ENTRY FUNNEL

EFT10

to be used with Current Collector KUFU25 or KESR32



Please note: Entry Funnel without current.

Entry speed: max. 100 m/min

Entry tolerance: horizontal: ± 10 mm

vertical: ± 10 mm

Version with PE-VP please inquire; KESR required

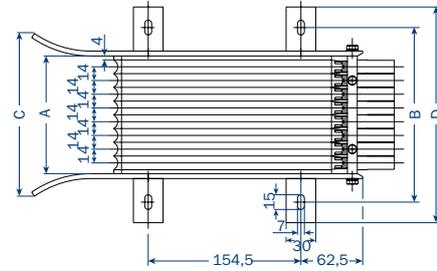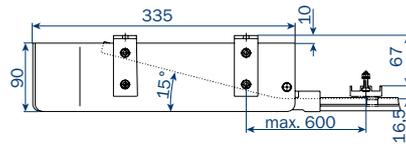

| Type | No. of cond. | A mm | B mm | C mm | D mm | Weight kg | Order No. |
|------------------|--------------|------|------|------|------|-----------|-----------|
| MU-EFT10-2-KUFU | 2 | 36 | 94 | 82 | 136 | 1,145 | 167 675 |
| MU-EFT10-3-KUFU | 3 | 50 | 108 | 96 | 150 | 1,230 | 167 676 |
| MU-EFT10-4-KUFU | 4 | 64 | 122 | 110 | 164 | 1,315 | 167 677 |
| MU-EFT10-5-KUFU | 5 | 78 | 136 | 124 | 178 | 1,400 | 167 678 |
| MU-EFT10-6-KUFU | 6 | 92 | 150 | 138 | 192 | 1,485 | 167 679 |
| MU-EFT10-7-KUFU | 7 | 106 | 164 | 152 | 206 | 1,570 | 167 680 |
| MU-EFT10-8-KUFU | 8 | 120 | 178 | 166 | 220 | 1,655 | 167 681 |
| MU-EFT10-9-KUFU | 9 | 134 | 192 | 180 | 234 | 1,740 | 167 682 |
| MU-EFT10-10-KUFU | 10 | 148 | 206 | 194 | 248 | 1,825 | 167 683 |

COMPACT CURRENT COLLECTOR SETS

KUFU25

for Entry Funnel EFT10

With 1 m connecting cable type FLA 2.5

max. continuous current: 25 A

Stroke: +15 mm / -10 mm


Swivel: ±15 mm

Contact pressure: approx. 3,5 N per contact brush

PE at No. 4 position, with 3 conductors at No. 3, with

2 conductors at No. 2. Variations are possible.

PE makes contact first when entering conductors.

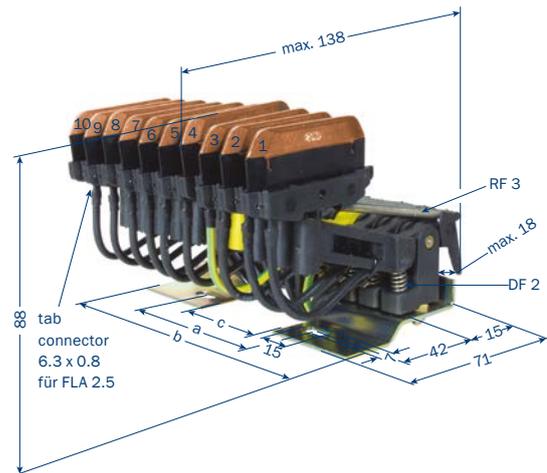


| Type | No. of cond. | Dim. a mm | Dim. b mm | Dim. c mm | Weight kg | Base plate | Order No. | |
|---|--------------|-----------|-----------|-----------|-----------|----------------------------|---------------------|-------------------|
| | | | | | | | with PE-VP | with PE-Standard |
| SA-KUFU25/2/14HS1,0/2/2 | 2 | - | 34 | - | 0,228 | 2 - polig | 168 040 | - |
| SA-KUFU25/2/14SS1,0/2 | 2 | - | 34 | - | 0,228 | 2 - polig | - | 168 051 |
| SA-KUFU25/3/14HS1,0/3/4/4 | 3 | 28 | 62 | - | 0,340 | 4 - polig (Nr. 4 = frei) | 168 041 | - |
| SA-KUFU25/3/14SS1,0/4/4 | 3 | 28 | 62 | - | 0,340 | 4 - polig (Nr. 4 = frei) | - | 168 052 |
| SA-KUFU25/4/14HS1,0/4/4 | 4 | 28 | 62 | - | 0,428 | 4 - polig | 168 042 | - |
| SA-KUFU25/4/14SS1,0/4 | 4 | 28 | 62 | - | 0,428 | 4 - polig | - | 168 053 |
| SA-KUFU25/5/14HS1,0/4/6/6 | 5 | 56 | 90 | - | 0,549 | 6 - polig (Nr. 6 = frei) | 168 043 | - |
| SA-KUFU25/5/14SS1,0/6/6 | 5 | 56 | 90 | - | 0,549 | 6 - polig (Nr. 6 = frei) | - | 168 054 |
| SA-KUFU25/6/14HS1,0/4/6 | 6 | 56 | 90 | - | 0,637 | 6 - polig | 168 044 | - |
| SA-KUFU25/6/14SS1,0/6 | 6 | 56 | 90 | - | 0,637 | 6 - polig | - | 168 055 |
| SA-KUFU25/7/14HS1,0/4/8/8 | 7 | 80 | 118 | 53 | 0,744 | 8 - polig (Nr. 8 = frei) | 168 045 | - |
| SA-KUFU25/7/14SS1,0/8/8 | 7 | 80 | 118 | 53 | 0,744 | 8 - polig (Nr. 8 = frei) | - | 168 056 |
| SA-KUFU25/8/14HS1,0/4/8 | 8 | 80 | 118 | 53 | 0,832 | 8 - polig | 168 046 | - |
| SA-KUFU25/8/14SS1,0/8 | 8 | 80 | 118 | 53 | 0,832 | 8 - polig | - | 168 057 |
| SA-KUFU25/9/14HS1,0/4/10/10 | 9 | 80 | 146 | 53 | 0,959 | 10 - polig (Nr. 10 = frei) | 168 047 | - |
| SA-KUFU25/9/14SS1,0/10/10 | 9 | 80 | 146 | 53 | 0,959 | 10 - polig (Nr. 10 = frei) | - | 168 058 |
| SA-KUFU25/10/14HS1,0/4/10 | 10 | 80 | 146 | 53 | 1,047 | 10 - polig | 168 048 | - |
| SA-KUFU25/10/14SS1,0/10 | 10 | 80 | 146 | 53 | 1,047 | 10 - polig | - | 168 059 |
| Single conductor available, without connecting cable | | | | | | | Phase, black | PE, yellow |
| SA-KUFU25/28PH-78/15-0,0 | | | | | 0,051 | | 168 015 | - |
| SA-KUFU25/28PE-78/15-0,0 | | | | | 0,051 | | - | 168 016 |

COLLECTOR BRUSHES


width of Contact Brushes = 3.8mm




SK-KMKU25-20-14

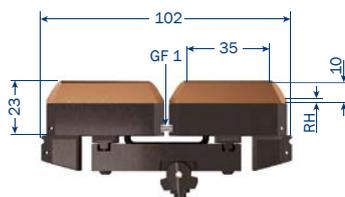


SK-KMKF2/40-04-14

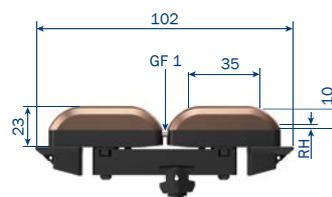

KMKF2/40VP-04-14

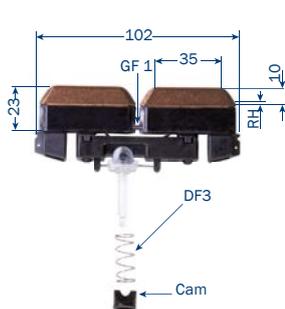

SK-DSW2/40-04-14-FN

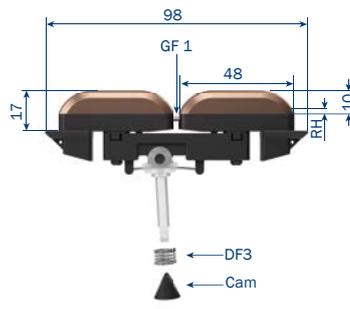


SK-DSW2/40VP-04-14-FN

Min. remaining Brush height (RH) = 3 mm

| Type | for Current Collector | Weight kg | Order No. |
|-----------------------|-----------------------|-----------|-----------|
| SK-KMKU25-20-14 | KUFU25 | 0,030 | 168 284 |
| SK-DSW2/40-04-14-FN | KDS2/40 | 0,049 | 168 151 |
| SK-DSW2/40VP-04-14-FN | KDS2/40 PE-VP | 0,060 | 144 059 |
| SK-KMKF2/40-04-14 | KUFR2/40 | 0,050 | 144 277 |
| SK-KMKF2/40VP-04-14 | KUFR2/40VP | 0,060 | 143 777 |

SPRINGS

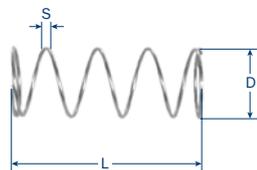

Compression Spring DF3



Tension Spring RF3



Alignment Spring GF1



Cam

| Type | for Current Collector | S mm | D mm | L mm | Order No. |
|------|-----------------------|------|------|-------|-----------|
| DF3 | KDS2/40 | 0,55 | 9,55 | 24,00 | 152 011 |
| RF3 | KUFU25, KUFR2/40 | 0,40 | 4,40 | 31,00 | 153 849 |
| GF1 | KDS2/40, KUFR2/40 | - | 2,00 | 21,50 | 153 850 |
| Cam | KDS2/40 | | | | 1011917 |

CONNECTING CABLE

CONNECTING CABLE, HIGHLY FLEXIBLE

for Current Collector, Feed Terminal, Transfer Guide and Isolating Assembly
(for Current Collector KDS and KUFR use Connecting Cable WFLA 2.5)



WFLA



FLA / FKA

FH

Length: 0.5m with tab plug 6,3 x 0,8
Longer connecting cable available

Length: 1m with tab plug 6,3x0,8
Longer connecting cable available

CONNECTING CABLE, DOUBLE INSULATION

for Current Collector or Feed Terminal

| Type | Cross section mm ² | Ø mm | | Weight kg | | Order No. Phase black | Order No. PE green/yellow |
|---------------------|-------------------------------|------|-----|-----------|-------|-----------------------|---------------------------|
| | | PH | PE | PH | PE | | |
| AL-FLA2,5PH1-6,3 | 2,50 | 3,9 | - | 0,037 | - | 165 049 | - |
| AL-FLA2,5PE1-6,3 | 2,50 | - | 3,6 | - | 0,035 | - | 165 050 |
| AL-FLA4PH1-6,3 | 4,00 | 5,4 | - | 0,064 | - | 165 051 | - |
| AL-FLA4PE1-6,3 | 4,00 | - | 5,2 | - | 0,059 | - | 165 052 |
| AL-FLA6PH1-6,3 | 6,00 | 5,7 | - | 0,086 | - | 166 368 | - |
| AL-FLA6PE1-6,3 | 6,00 | - | 5,7 | - | 0,083 | - | 166 369 |
| AL-WFLA2,5PH0,5-6,3 | 2,50 | 3,9 | - | 0,020 | - | 168 107 | - |
| AL-WFLA2,5PE0,5-6,3 | 2,50 | - | 3,6 | - | 0,018 | - | 168 108 |

CONNECTING CABLE, SINGLE INSULATION

for Isolating Assembly only

| Type | Cross section mm ² | Ø mm | | Weight kg | | Order No. Phase black | Order No. PE green/yellow |
|-------------------|-------------------------------|------|-----|-----------|-------|-----------------------|---------------------------|
| | | PH | PE | PH | PE | | |
| AL-IFKA1,5PH1-6,3 | 1,50 | 3,0 | - | 0,020 | - | 166 557 | - |
| AL-IFKA1,5PE1-6,3 | 1,50 | - | 3,0 | - | 0,020 | - | 166 558 |
| AL-IFKA2,5PH1-6,3 | 2,50 | 3,7 | - | 0,032 | - | 166 238 | - |
| AL-IFKA2,5PE1-6,3 | 2,50 | - | 3,7 | - | 0,032 | - | 166 239 |
| AL-IFKA4PH1-6,3 | 4,00 | 4,3 | - | 0,050 | - | 166 240 | - |
| AL-IFKA4PE1-6,3 | 4,00 | - | 4,3 | - | 0,050 | - | 166 241 |
| AL-IFKA6-PH1-6,3 | 6,00 | 4,9 | - | 0,064 | - | 166 242 | - |
| AL-IFKA6-PE1-6,3 | 6,00 | - | 4,9 | - | 0,064 | - | 166 243 |

TAB PLUG ONLY (WITHOUT CABLE)

| Type | for cable cross section mm ² | Weight kg | Order No. |
|--------|---|-----------|-----------|
| FH2,5 | 2,5 | 0,002 | 165 120 |
| FH4-6 | 4-6 | 0,002 | 165 121 |
| WFH2,5 | 2,5 | 0,002 | 168 109 |

TERMINAL BOX

TERMINAL BOX AKE

for conductor current supply with max. 7 x 6 mm² terminal clamps and 2 x 6 mm² PE terminal clamps.

Please inquire when terminal clamp variations are desired.




| Type | Weight kg | Order No. |
|-----------------------------|-----------|-----------|
| ES-AKE1-PH7x2L6-PE2x2L6-M25 | 0,445 | 169 462 |

BRUSH WEAR INDICATOR

Brush wear indicator can be supplied installed on 0.5m conductor section. Please specify the corresponding conductor arrangement when ordering.

The Brush Wear Indicator checks the remaining brush height each time a collector set passes. Max. travel speed 70m/min. When the remaining brush height reaches the preset value of 3 mm the Brush Wear Indicator will send an impulse. It is practical to install the Brush Wear Indicator ahead of a track switch, then the impulse can actuate the track switch to send the unit directly into a maintenance spur.

An opening, min. width 70mm height 50mm, must be cut at the EMS track web. PE position is variable, similarly to the conductor arrangement; please inquire. Differing remaining brush height settings above 3 mm are also available.

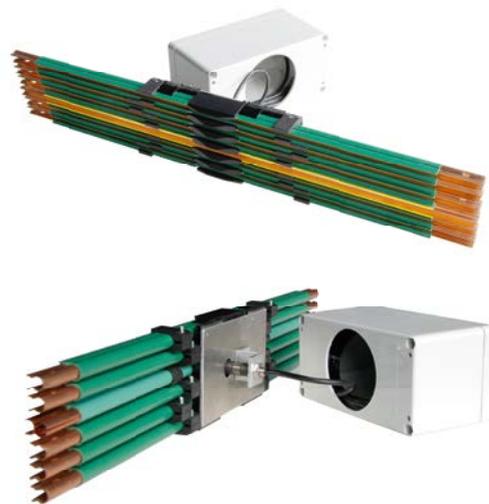

BRUSH WEAR INDICATOR WITH INDUCTIVE PROXIMITY SWITCH

The last slot of a Brush Wear Indicator with an uneven number of conductors remains unoccupied.

| Type | No. of conductors | Weight kg | Order No. PE-VP at No. 4 | Order No. PE at No. 4 |
|----------------------|-------------------|-----------|--------------------------|-----------------------|
| VT-KVT10-4-14VP4B | 4 | 2,011 | 143 637 | - |
| VT-KVT10-4-14HS4B | 4 | 2,011 | - | 166 957 |
| VT-KVT10-5-14VP4B/6 | 5 | 2,252 | 144 093 | - |
| VT-KVT10-5-14HS4B/6 | 5 | 2,252 | - | 167 440 |
| VT-KVT10-6-14VP4B | 6 | 2,453 | 143 304 | - |
| VT-KVT10-6-14HS4B | 6 | 2,453 | - | 166 895 |
| VT-KVT10-7-14VP4B/8 | 7 | 2,692 | 143 466 | - |
| VT-KVT10-7-14HS4B/8 | 7 | 2,692 | - | 167 441 |
| VT-KVT10-8-14VP4B | 8 | 2,893 | 143 646 | - |
| VT-KVT10-8-14HS4B | 8 | 2,893 | - | 166 896 |
| VT-KVT10-9-14VP4B/10 | 9 | 3,131 | 144 094 | - |
| VT-KVT10-9-14HS4B/10 | 9 | 3,131 | - | 167 442 |
| VT-KVT10-10-14VP4B | 10 | 3,335 | 144 095 | - |
| VT-KVT10-10-14HS4B | 10 | 3,335 | - | 166 897 |

INSTALLATION TOOLS

CURVE TOOL

for forming U10 vertical and horizontal curves.

Filler Rods must be ordered separately.



| Type | Description | Weight kg | Order No. |
|--------------------------|--|-----------|-----------|
| MZ-BVU10-VP | Curve tool | 6,918 | 143 318 |
| MZ-FU10-V ⁽¹⁾ | Filler rod for PH/PE (4 m) | 0,371 | 165 234 |
| MU-FU10-H ⁽²⁾ | Filler rod for PH/PE (4 m) | 0,354 | 144 416 |
| MZ-FU10-S-VP | Filler rod for PE-VP hollow body (4 m) | 0,156 | 143 279 |
| MZ-FU10-VP-E | Filler rod for PE-VP contact surface (4 m) | 0,208 | 143 280 |

TABLE SAW

for cutting U10 insulator shroud and conductor profiles, with length stop

Voltage required: 230V, 50 Hz



| Type | Description | Weight kg | Order No. |
|---------|-------------------|-----------|-----------|
| MZ-KS10 | Table Saw, compl. | 6,500 | 165 276 |
| MZ-SB | spare saw blade | 0,070 | 165 263 |

CONDUCTOR PUNCH TOOL

for punching Joint Splice window into conductor profile after cutting standard length section.

For phase and PE and PE-VP conductors.



Standard PH/PE



PE-VP

| Type | Description | Weight kg | Order No. |
|--------------|--|-----------|-----------|
| MZ-LZ10PE-VP | Conductor Punch Tool for PE-VP | 0,595 | 143 223 |
| MZ-LZ10PH/PE | Conductor Punch Tool for Phase und standard PE | 0,480 | 144 363 |

DEBURRING FILE



RF



HRF

| Type | use for | Weight kg | Order No. |
|-------------------------------------|--|-----------|-----------|
| ROUND FILE RF-150 LANG/HIEB 3/D=6MM | deburr inside profile after cutting section | 0,085 | 143 330 |
| HALF ROUND FILE HRF-150 LANG/HIEB 3 | deburr outside profile after cutting section | 0,085 | 165 264 |

ADJUSTMENT JIG

facilitates cutting precise length of insulation shroud without using measuring tape.



| Type | Weight kg | Order No. |
|---------|-----------|-----------|
| MZ-ST10 | 0,150 | 165 091 |

⁽¹⁾ For making vertical EMS curve sections.

⁽²⁾ For making horizontal and outward facing AEM curve sections.

JOINT SPLICE/FEED ASSEMBLING TOOL

- To push conductor into Joint Splice clip
- If necessary, to widen conductor slot opening
- To move Joint Splice cap in place



| Type | Weight kg | Order No. |
|------------|-----------|-----------|
| MZ-MG-SW10 | 0,125 | 165 093 |

LOCKING PIN DRIVER

to insert BFU Anchor Bar Transfer Guide locking pins



| Type | Weight kg | Order No. |
|---------|-----------|-----------|
| MZ-ED10 | 0,010 | 165 277 |

CONDUCTOR REMOVAL TOOL

to release and remove conductors from Compact Hangers



| Type | Weight kg | Order No. |
|----------|-----------|-----------|
| MZ-DMW10 | 0,039 | 165 119 |

DRILLING JIG FOR FIX POINT (PE-VP)



| Type | Weight kg | Order No. |
|----------|-----------|-----------|
| MZ-BS10A | 0,036 | 143 425 |

SPIRAL DRILL


to drill holes for Locating Clamps USK 10A-VP at fix points



| Type | Weight kg | Order No. |
|-------------------------------|-----------|-----------|
| SPIRAL DRILL Ø 3,2 MM, TYPE N | 0,003 | 143 426 |

INSTALLATION TOOL BOX

includes 1x BVU10-VP Curve Tool, with Filler Rods 1x FU10, 1x FU10S-VP and 1x FU10VP-E, 1x KS10 Table Saw, 1x SB spare blade, 1x LZ10PE-VP and 1x LZ10PH/PE Conductor Punch Tool, 1x RF round file and 1x HRF half round file, 1x ST10 Adjustment Jig, 1x MG-SW 10 Joint Splice/Feed assembly tool, 1x ED10 Locking Pin Driver, 1x DMW10 Conductor Removal Tool, 1x BS10A Drilling Jig, 1x spiral drill Ø 3,2 mm
Installation tool box can be locked.

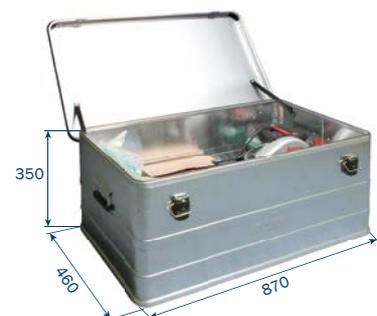

| Type | Weight kg | Order No. |
|----------|-----------|-----------|
| MZ-MWK-K | 26,500 | 166 548 |

APPLICATION QUESTIONNAIRE FOR U10

Customer _____ Date _____
 Final customer _____ Project No. _____
 Installation _____

CUSTOMER CONTACT

| | Name | Fon | E-Mail |
|--------------------|------|-----|--------|
| Technical planning | | | |
| Purchasing | | | |

SCOPE OF SUPPLY

- vCONDUCTOR vPOS vCOM vDRIVE
 Installation VAHLE components Installation Non-VAHLE components _____
 Disassembly Disassembly Non-VAHLE components _____

SCHEDULE

Proposal submittal _____ week/date Delivery _____ week/date
 Installation start _____ finish _____ week/date weekdays weekends

MECHANICAL DATA

1. INSTALLATION CONCEPT:

- New installation
 Alteration / Expansion Original Conductor System Delivery No.: _____
 Replacement 1:1 Original Conductor System Delivery No.: _____

2. TYPE OF APPLICATION:

- EMS Floor Track Systems (2 tracks)
 Skillet system Other _____

3. CARRIER TRACK / CARRIER TRACK SUPPLIER / TRACK DESIGNATION:

- 180x60 / _____ / _____ Other _____ / _____ / _____
 240x80 / _____ / _____

4. CONDUCTOR ORIENTATION:

- Facing sideways in direction of travel: right left
 Facing downward

5. INSTALLATION HEIGHT:

Off facility floor or support floor _____ mm freely traversible

6. TRACK EXPANSION GAPS:

Expansion distance / gap dimension _____ mm

7. BUILDING EXPANSION GAPS:

Expansion distance / gap dimension _____ mm

8. SPECIFIC BUILDING FEATURES:

ELECTRICAL DATA

9. OPERATING VOLTAGE:

Three-phase current Alternating current Direct current _____ V _____ Hz

10. TYPE OF CONDUCTOR:

- U10/25C copper conductor
- U10/25E stainless steel conductor

11. NUMBER OF CONDUCTORS (POLES):

Main current _____ Control current _____ Ground (PE) standard _____
 PE-VP Ground conductor with phase collector avoidance protection available only in copper _____

12. CONDUCTOR SEQUENCE:

Compact hanger number of conductors Location top to bottom:

| Conductor | Position | Example 12. Cond. Hanger w/6 pos. used |
|-----------|----------|---|
| 1. | | open |
| 2. | | open |
| 3. | | L1 |
| 4. | | L2 |
| 5. | | L3 |
| 6. | | PE-VP |
| 7. | | C1 |
| 8. | | C2 |
| 9. | | open |
| 10. | | open |
| 11. | | open |
| 12. | | open |

13. TRAVEL MODE:

One direction only _____ bi-directional _____ / _____ %

14. TRAVEL SPEEDS:

Travel speed V max. straight: _____ m/min

Travel speed V max. curve: _____ m/min

Acceleration _____ m/s² acceleration time _____ s

15. CONNECTING CABLES FOR CONDUCTORS

Joint Splice/Feed, Feed Terminal main current conductors _____cross section _____ mm²
 Track switch Transfer Guides main current conductors _____cross section _____ mm²
 Feeds and Transfer Guides control current _____cross section _____ mm²

ENVIRONMENTAL REQUIREMENTS

16. INSTALLATION LOCATION

Indoors Cool storage Freezer (to -30°C)

17. AMBIENT TEMPERATURE

_____ °C min. _____ °C max.

INSTALLATION TEMPERATURE

approx. _____ °C

18. RELATIVE HUMIDITY _____%

at ambient temperature _____ °C

OXYGEN REDUCED ATMOSPHERE

Oxygen content _____%

19. EXTRAORDINARY ENVIRONMENTAL CONDITIONS:

vPOS - POSITIONING SYSTEM

20. TYPE:

APOS Optic APOS Magnetic
 Support system for Leuze Barcode (35 mm)

vCOM - DATA TRANSMISSION

21. TYPE:

SMGM
 Powercom (utilizing conductor system)
 Semi-Wave (utilizing conductor system, only together with vDRIVE)
 CAN-Bus (utilizing conductor system, only together with vDRIVE)

CONFIGURATION NOTES:

Not suited for outdoor installation.

DRAWINGS







Paul Vahle GmbH & Co. KG

Westicker Str. 52
59174 Kamen
Germany

Fon.: +49 2307 704-0
Fax: +49 2307 704-444
info@vahle.de

www.vahle.com