



General description

Housing

Dimensions	For all types, the housing dimensions and the required panel cut-outs comply with DIN 43 700.	
Material	N Series	Lexan 500 (self-extinguishing pursuant to UL 94 V-O)
	48 DIN, PK 72 DIN, PK 96 DIN	PC / ABS
	72 DIN, 96 DIN, 144 DIN	Sheet steel, galvanized
IP code	All housings follow DIN EN 60 529 and comply with IP 52 on front side, or special models with IP 54, where possible,	
Snap-on fastening	For types of the N series and 48 DIN for panel thickness 1 mm to 3 mm (no separate fastening element)	

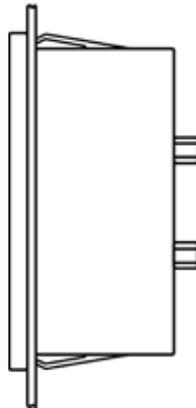

Fastening according to DIN 43 835 With screw clamp, panel thickness 1 mm to 4 mm (standard type, Figure 1) with DIN screw clamp shape B, panel thickness 1 mm to 40 mm for types 72 DIN, 96 DIN, 144 DIN (Figure 2) against surcharge

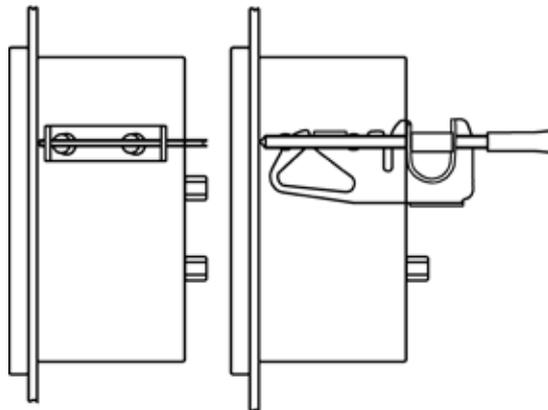

Contact protection sleeves

