

GKS-113 306 230 R 1502 M

in product series GKS-113 M

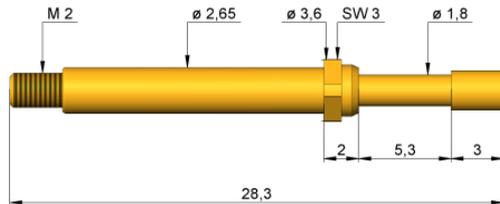


Image similar

Tip style



Image similar

General data

Order designation	GKS-113 306 230 R 1502 M
Variant number	GKS-113-0210
Sub product group	Screw-in test probes
Series	GKS-113 M screwable
Type of installation	screw-in
Quick-exchange system	yes
Installation height adjustable	no
Non-rotating	no
Magnetic	yes
screw-in torque	10 - 20 Ncm

Mechanical data

Grid	4 mm
Total length	28.3 mm
Collar height	02
Probe barrel diameter	2.65 mm
Installation height without receptacle	10.3 mm
Working stroke	4 mm
Max. stroke	5.3 mm
Spring force at working stroke	1.5 N

Electrical data

Current load capacity / rated current	8 A
Resistance (Ri typical)	30 mOhm

Plunger head data

Tip style	06 serrated
Tip style diameter	2.30 mm
Tip style material	3 BeCu
Tip style surface	R Rhodium

Operating temperature range

Temperature min.	- 40 °C
Temperature max.	+ 80 °C