


## connector



design	connector according to industrie form C
ambient temperature	-25...+90°C without LED and -25...+60°C with LED
cable gland	M12x1, cable diameter 5...6mm
cable cross section connectable	0,34-0,5mm <sup>2</sup>
protection class	IP65 according to EN 60529
scope of supply	incl. mounting screw and seal NBR

## dimensions

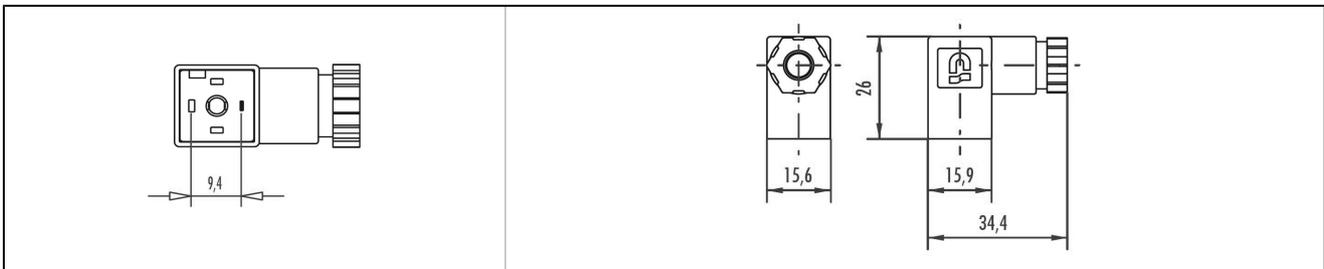

## circuit options

circuit diagramm	description
	without circuit
	bipolar LED and varistor

description	voltage	operating current max.	type
connector	0-230VAC/DC	6A	6-14123-0000-S
connector with varistor and bipolar yellow LED	230VAC/DC	1,5A	6-14423-0528
connector with varistor and bipolar yellow LED	24VAC/DC	1,5A	6-14423-0525

illustrations are non-binding  
all designs, configurations, measurements and materials are subject to change without prior notice