

# THE HEAVY DUTY NONMETALLIC CABLE RACK



For Power and Communications Manholes and Vaults



- Nonmetallic
- Will Not Rust or Corrode
- High Load Capacity
- No Grounding or Bonding
- Molded from UL Listed  
Glass Reinforced Polymer
- Insulators Not Required
- Excellent Dielectric Properties

RATED CAPACITY			
CATALOG NUMBER	ARM LENGTH	RATED LOAD (LBS)*	DEFLECTION (INCHES)*
3HDS	3" SADDLE	450	-
RA04	4"	450	.082
RA06	6"	450	.156
RA08	8"	450	.218
RA11	11"	400	.250
RA14	14"	350	.312
RA20	20"	250	.234

\*Concentrated load and deflection 1" from end of arm.




HDL - Arm lock shown with RA04 Arm and CR36-B Stanchion



3HDS - 3 throat saddle shown with a cable secured by cable ties.



RA08 - 8 arm shown with three cables secured by cable ties.

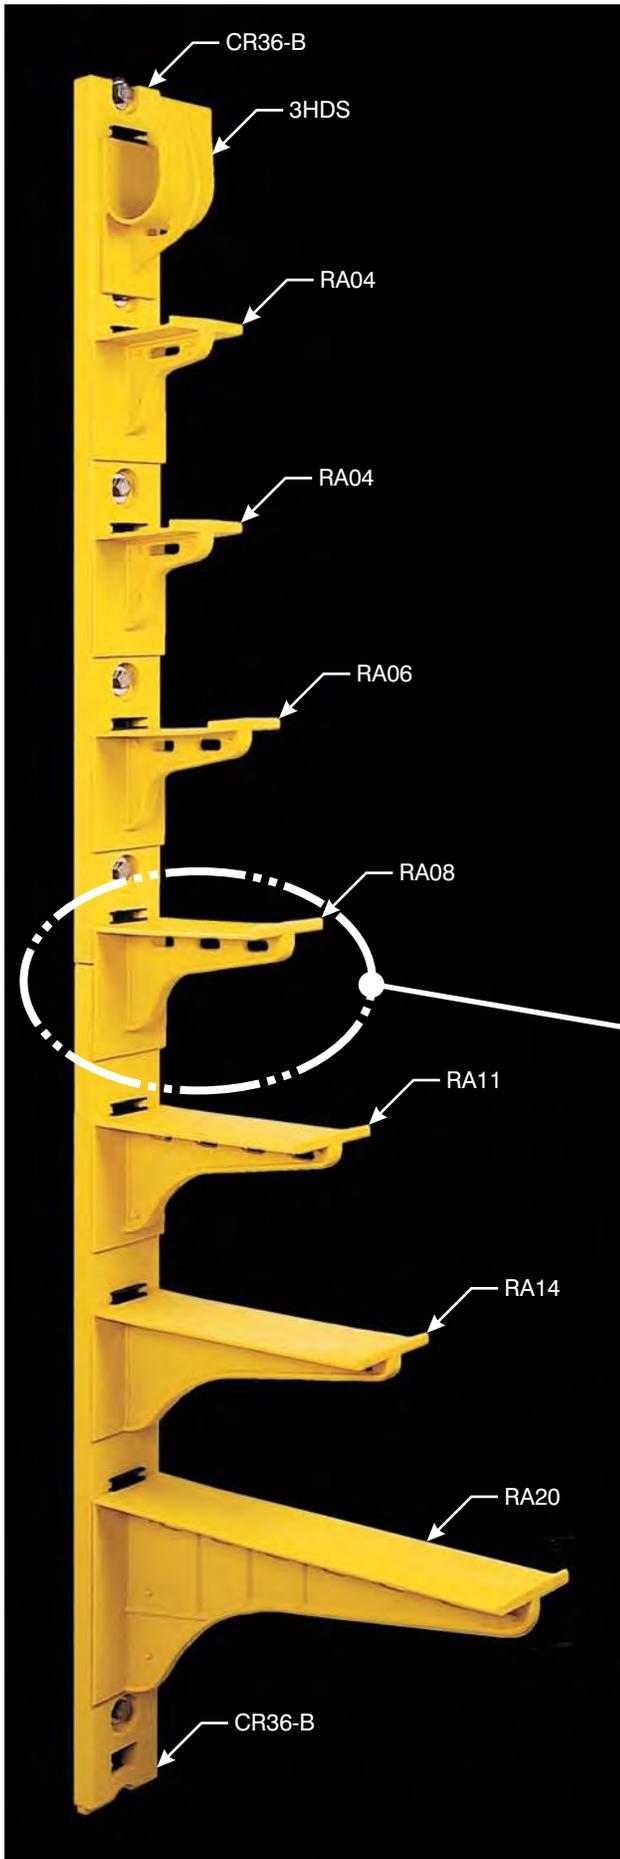

ORDERING INFORMATION				
CATALOG NUMBER	DESCRIPTION	STANDARD CARTON		
		QUANTITY	LBS.	CU. FT.
CR36-B	36" Stanchion	10	39.4	1.32
CR28-B	28" Stanchion	10	30.1	.96
CR24-B	24" Stanchion	10	25.8	.83
CR20-B	20" Stanchion	10	21.3	.66
CR16-B	16" Stanchion	10	17.2	.52
CR12-B	12" Stanchion	10	12.7	.36
CR8-B	8" Stanchion	10	8.6	.24
3HDS	3" Saddle	10	7.7	.69
RA04	4" Arm	10	7.7	.41
RA06	6" Arm	10	9.5	.51
RA08	8" Arm	10	11.8	.78
RA11	11" Arm	10	14.4	.95
RA14	14" Arm	10	18.1	1.17
RA20	20" Arm	10	32.5	2.37
HDL	Arm Lock	50	0.9	0.06




Stanchions can be installed in tandem. Arm can jump the joint between two stanchions without any loss in arm capacity.


**NOTES:**

1. Installation drawings and instructions, installation hardware, guide specifications and load vs deflection details are available on separate catalog pages and at [www.udevices.com](http://www.udevices.com).
2. Installation drawings and instructions in AutoCAD® format are available for insertion into your drawings and specifications.


# THE HEAVY DUTY NONMETALLIC CABLE RACK COMPONENT PARTS

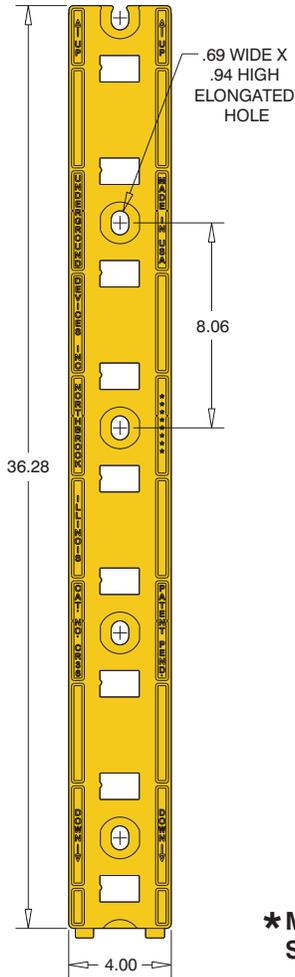


**CR36-B\***

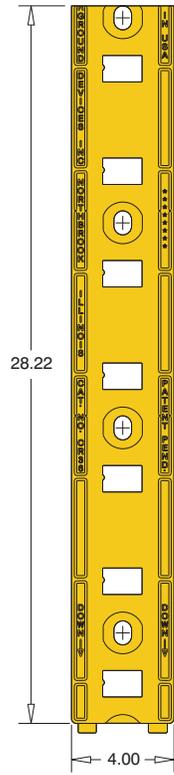


**CR28-B**

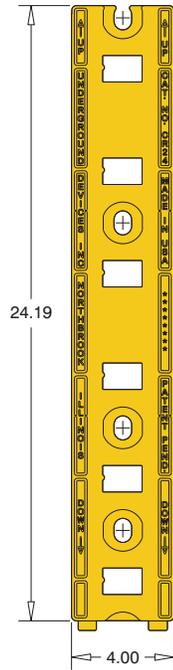


**CR24-B\***

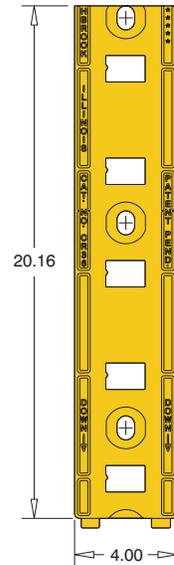


**CR20-B**

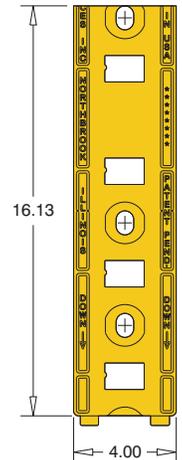

**CR16-B**




**CR8-B**

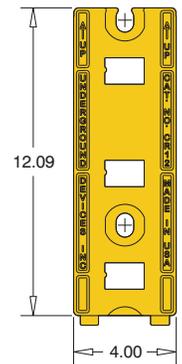


**CR12-B\***


**\* MOST COMMONLY USED STANCHIONS AND ARMS.**




**HDL**




**RA04**




**RA06**




**RA08\***

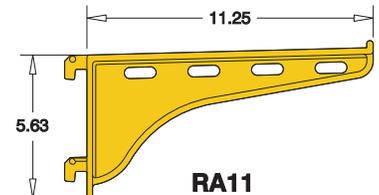


**RA11**



**3HDS\***

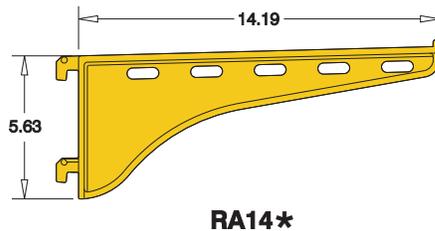

**RA14\***

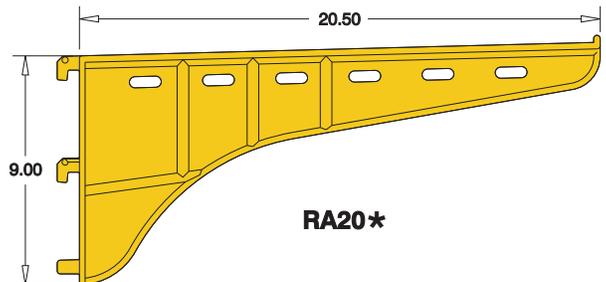

**RA20\***

**TERMS:** Net 30 days - \$100.00 minimum net billing. All prices FOB our factory or warehouse location with freight to be charged directly by the carrier.

**CLAIMS:** Claims for damages or shortages shall first be processed with carrier by consignee.

**RETURN GOODS POLICY:** A 25% re-stocking charge will be made on orders returned, transportation prepaid, to the original shipping point following authorization from UNDERGROUND DEVICES, INC. Authorization will be granted only under the conditions that the quantity to be returned does not exceed 10% of the quantity ordered, the goods are in saleable condition in the original cartons and the request for return is made within 90 days of the shipping date.

**LIMITED WARRANTY:** UNDERGROUND DEVICES, INC. Warrants to the original purchaser that the goods manufactured by it are free from defects in material and workmanship for a period of one year from the date of purchase. Consequences of improper selection or installation of UNDERGROUND DEVICES product on any application over any period of time is the sole responsibility of the Purchaser or User. UNDERGROUND DEVICES liability is limited to replacement of, or credit for, defective products. UNDERGROUND DEVICES, INC. WILL IN NO EVENT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



## **UNDERGROUND DEVICES INCORPORATED**

3304 COMMERCIAL AVENUE NORTHBROOK, ILLINOIS 60062  
Phone: (847) 205-9000 Fax: (847) 205-9004  
Website: <http://www.udevices.com>