

VIBRATION TRANSMITTER

TR-26

The integrated transmitter TR-26 measures the absolute vibrations of any rotating machine support and it is able to interface directly in 2 wires technique (current loop 4 ÷ 20 mA) to an acquisition system (PLC or DCS). The transmitter, secured directly on machinery, generates an electric signal (4÷20 mA) which is proportional respectively to vibration velocity or acceleration. The transmitter is made of an AISI 316L body with machine connection thread; the connection to the acquisition system is effected by means of a MIL-C-5015-2 poles connector.



NOTE: The transmitter is available in different configuration versions and does not need any set-up or maintenance.

The transmitter is certified for application in classified area as

 II 2 G Ex ia IIC T6, T5, T4 Gb (ATEX)

Ex ia IIC T6, T5, T4 Gb (IECEX)



The transmitter is certificate SIL 2 for functional safety.



TECHNICAL CHARACTERISTICS

Composition	<ul style="list-style-type: none"> ■ AISI 316L stainless steel body
Power supply	<ul style="list-style-type: none"> ■ 24 Vdc (10 ÷ 35 Vdc) current loop 4 ÷ 20 mA (2 wires)
External connections	<ul style="list-style-type: none"> ■ MIL-C-5015 2 poles connector (conductors max section 2,5 mm²) ■ 4 poles M12 connector
Environmental	<ul style="list-style-type: none"> ■ - 60°C ÷ + 120°C ■ IP 65 EN 60529/10.91 standards
Measure type	<ul style="list-style-type: none"> ■ omnidirectional seismic (absolute vibration)
Application axis	<ul style="list-style-type: none"> ■ any
Dynamic field	<ul style="list-style-type: none"> ■ ± 18 g
Transverse sensitivity	<ul style="list-style-type: none"> ■ < 5 %
Linearity	<ul style="list-style-type: none"> ■ ± 3% - 75 Hz
Dynamic performances	<ul style="list-style-type: none"> ■ ±5% / 10Hz-1kHz ■ -3db / 1,5Hz - 2kHz
Insulation	<ul style="list-style-type: none"> ■ ≥10⁸ Ω between signal and container
Standard machine connection thread	<ul style="list-style-type: none"> ■ see tables "MACHINE CONNECTION THREAD"
Maintenance	<ul style="list-style-type: none"> ■ no maintenance is needed
Electrical connections	<ul style="list-style-type: none"> ■ bipolar shielded cable
Mounting torque	<ul style="list-style-type: none"> ■ 5 ÷ 10 N-m

TR-26

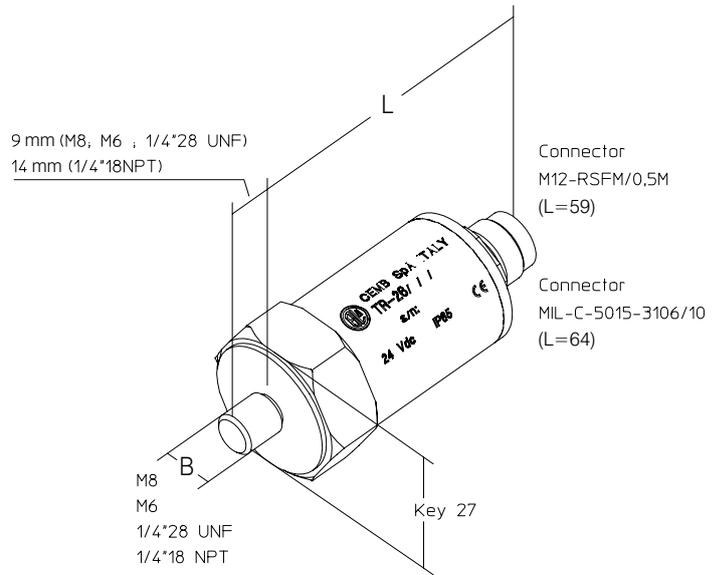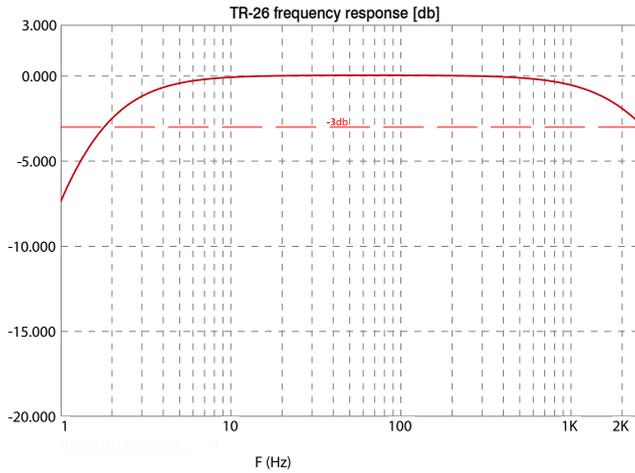

ORDER INFORMATION

TR - 26 / / / /

A: MEASURING FIELD

0	0 ÷ 10 mm/s RMS
1	0 ÷ 20 mm/s RMS
2	0 ÷ 50 mm/s RMS
3	0 ÷ 100 mm/s RMS
4	0 ÷ 1 g RMS
5	0 ÷ 5 g RMS
6	0 ÷ 10 g RMS
7	0 ÷ 25,4 mm/s (0 ÷ 1 in/s) RMS
8	0 ÷ 12,7 mm/s (0 ÷ 0,5 in/s) RMS
S	special to be defined

B: MACHINE CONNECTION THREAD

0	M8x1,25
1	1/4" - 18NPT
2	1/4" - 28UNF
3	M6x1 (only for standard version)

D: CONNECTION

0	MIL-C-5015 2 pins
1	M12 4 pins (only for standard version)

C: CERTIFICATIONS

0	standard
2	Ex II 2 G Ex ia IIC T6, T5, T4 Gb (ATEX)
5	Ex ia IIC T6, T5, T4 Gb (IECEx)

CABLES AND OPTIONAL ACCESSORIES

CABLES:



SHIELDED CABLE 2X1 STANDARD 80419-P
CBL-TR-26 / S / 0 / XX (length in meters)



SHIELDED CABLE ARMoured IN ETFE 87SEA7952
CBL-TR-26 / E / 0 / XX (length in meters)



SHIELDED CABLE 2X1 WITH METAL JACKET COVERED BY PVC 95743-P
CBL-TR-26 / A / 0 / XX (length in meters)



SHIELDED CABLE ARMoured IN ETFE WITH SILICON BUMP
CBL-TR-26 / E / 2 / XX (length in meters)

ONLY CONNECTORS:



2 PINS STRAIGHT (standard) 597023104



2 PINS 90° 597023108 + 59070352

OTHER:

ZENER BARRIER Z787 (for hazardous area) 800208787



PLASTIC TAG 040STR000



STAINLESS STEEL TAG 980710835

All the data and features mentioned in this catalogue are purely for information and do not constitute any commitment on the part of our company, which reserves the right to make any and all alterations it may consider suitable without notice.