

Threephase RC Units Series Filters

AREL

Features & Applications

Elimination of sparks and transient phenomena in switching circuits, radio interference suppression, thyristors protection in low power applications

RC units are mounted in parallel with the contacts to be protected or in parallel with the inductive load

Safety approval: **CE**

Reference standard: **RoHS**



Technical data

Rated Voltage	575VAC			
Test Voltage	line-line	1600VDC	Climatic Category	25/085/21
	line-case	2500VAC	Operating Frequency	50/60Hz

Tabulates

Part No.	Capacity Value (μ F)	Resistors Value (Ω)	Rated Voltage VAC	Power KW	Dimensions	Electrical Schematics	Leads
							
TSBA10428	3x0.1	22	575	4.5	Fig.1	Fig.1	
TSBA22428	3x0.22	22	575	4.5	Fig.1	Fig.1	

Other values are available on request.

Electrical schematics

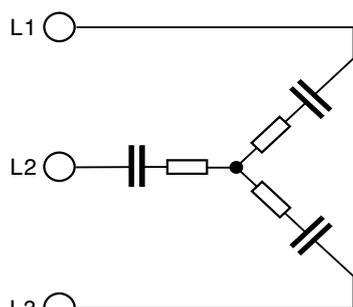


Fig.1

Threephase RC Units Series Filters

AREL



Dimensions (mm)

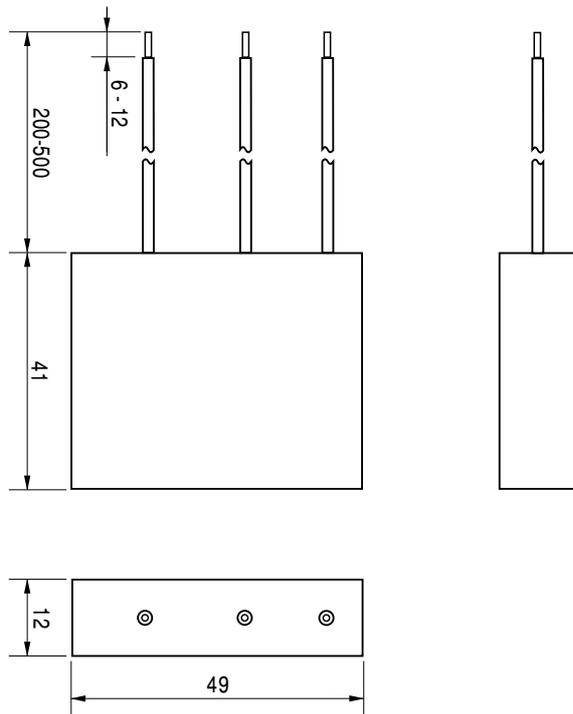


Fig.1