

**Art. "T" - SHUTTER VALVE WITH RIGHT-ANGLE CONNECTION FOR LOW PRESSURE**

**DESCRIPTION**

Valve with flat shutter closing.  
 SEAL: NBR or FPM.  
 Perfect airtight even with high operating frequencies.  
 Pneumatic actuator with reciprocating piston movement.  
 Connections with inner GAS ISO 228 thread female-female.  
 On request with NPT connections.  
 Control air 1/8" GAS connections.

**ALLOWABLE TEMPERATURES**

Operating temperature:  
 Seal in NBR: from -20°C to +100°C  
 Seal in FPM: from -15°C to +100°C

**ACTUATOR PILOT PRESSURE.** Max 8 bar.

**VERSIONS AND SIZES**

DA: 3/4" - 1" - 1 1/4"



SANC: 3/4" - 1" - 1 1/4"

**ANODIZING TREATMENT ON OUTSIDE DETAILS**

**MADE IN ALUMINIUM**

It is **not subject** to the "Water Hammer" if the fluid pass through the valve in the direction of the arrow printed on the body (under the actuator).

With these conditions the tightness is guaranteed up to the pressures shown in the Differential Pressure Chart.

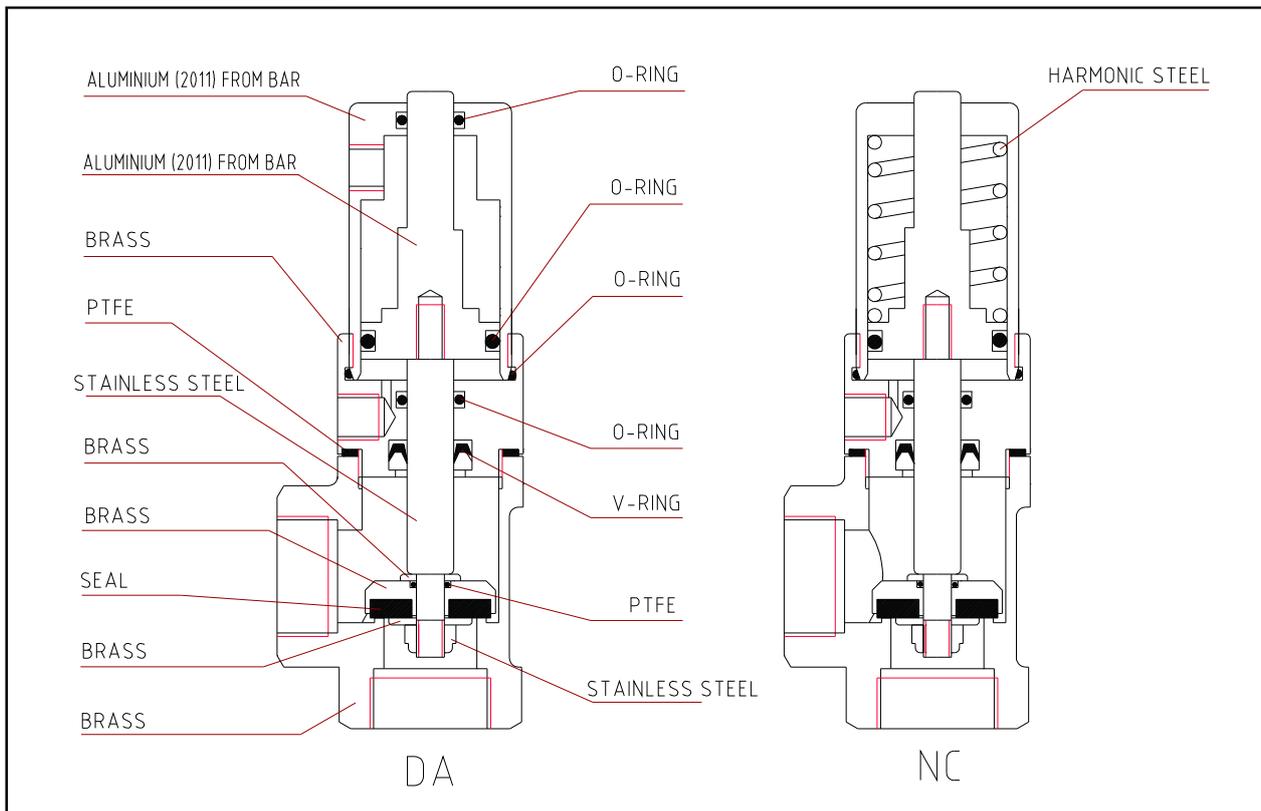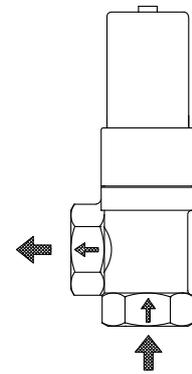


Art. "T"

**DIFFERENTIAL PRESSURE CHART**

NC VERSION		DA VERSION		
G	DeltaP bar	G	PILOT PRESS.	DeltaP bar
3/4"	3	3/4"	3	3.5
1"	3	3/4"	4	4.5
1"1/4	3	3/4"	5	6
		1"	3	3.5
		1"	4	4.5
		1"	5	5.5
		1"1/4	3	3
		1"1/4	4	4
		1"1/4	5	5

**MINIMUM PRESSURE REQUIRED TO OPEN NC VERSION**

G	3/4"	1"	1"1/4
Bar	6	5.5	5.5

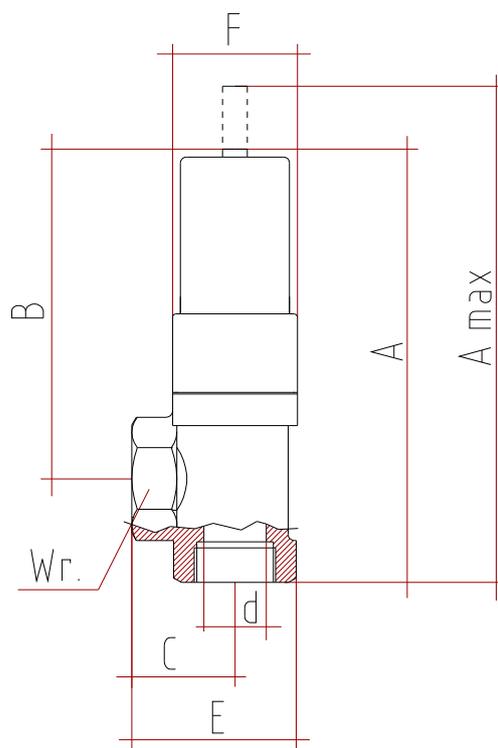

**OVERALL DIMENSIONS**

DN	G	A	A max	B	C	d	E	F	Wrench	Kv	Weight
mm.		mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	m3/h	gr.
20	3/4"	142	162	105	37	20	57	40	34	8	600
25	1"	153	173	110	43	24	66	40	40	11	750
32	1"1/4	182	210	135	47	30	76	53	50	18	1050